
Product data sheet




GF Uponor S-Press adapter female thread FT 14-Rp1/2"

1014515

- Made of tin-plated brass
- Contoured Aluminium-sleeve with inspection windows
- Fast 3-step installation (press without bevel)
- Colour coded, breakaway press indicator

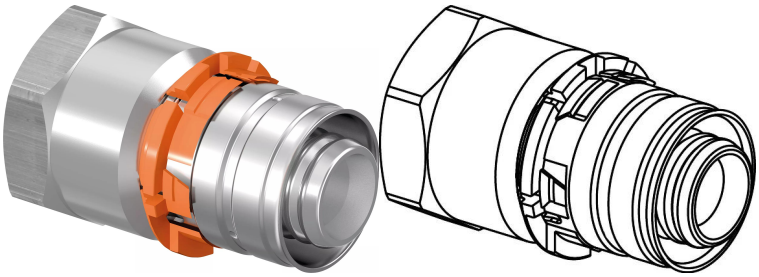



About GF Uponor S-Press adapter female thread FT

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press adapter female thread FT 14-Rp1/2"

1014515

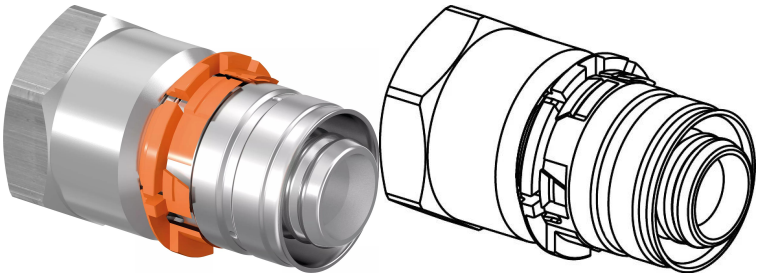



Measurements

Female thread Rp	1/2
LENGTH_L	49
Length (l1)	15
Length (l2)	21,3
z1	12,7

Product code

Item no EAN	4021598300873
Item no GTIN	04021598300873

Dimensions

Item Unit Height	50
Item Unit Length	27
Item Unit Weight	0,07
Item Unit Width	27
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905634811
Packaging GTIN PL3	06414905445387
Packaging GTIN PL4	06414905488940
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277

Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	1,438
Packaging Weight PL3	5,852
Packaging Weight PL4	586,792
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+