
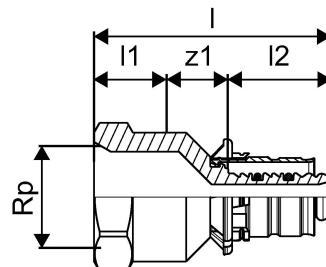


Uponor S-Press adapter female thread 14-Rp1/2"FT 1014515

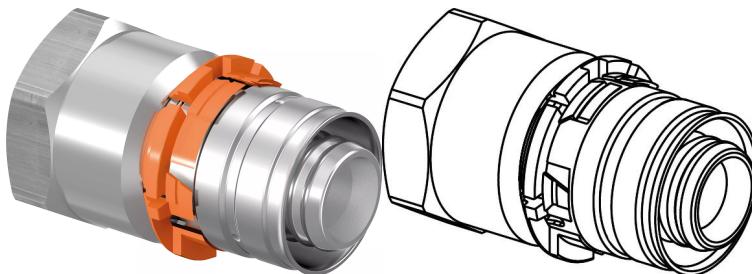

About Uponor S-Press adapter female thread

Specification

- with fixed press sleeve
- stop ring
- test safety



Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)
- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar
- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.
- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'
- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass
- if not different mentioned:
- Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC
- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC
- KIWA – UK water Regulation 4
- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press adapter female thread 14-Rp1/2"FT 1014515

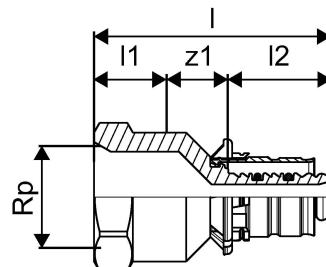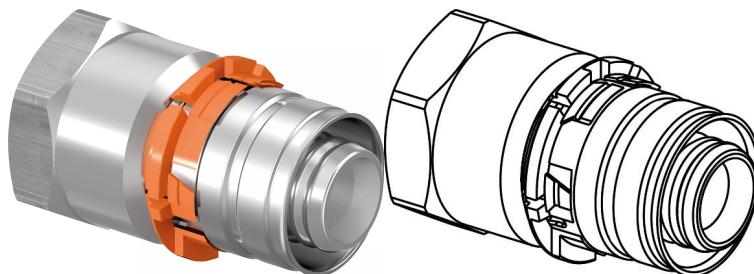

Measurements

Female thread Rp	1/2
LENGTH_L	49
z1	13

Product code

Item no EAN	4021598300873
Item no GTIN	04021598300873

Dimensions

Item Unit Height	50
Item Unit Length	27
Item Unit Weight	0,07
Item Unit Width	27
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905634811
Packaging GTIN PL3	06414905445387
Packaging GTIN PL4	06414905488940
Packaging Height PL1	89
Packaging Height PL3	95
Packaging Height PL4	714
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200
Packaging Quantity PL1	20
Packaging Quantity PL3	80
Packaging Quantity PL4	7680

Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,004710385
Packaging Volume PL4	0,68544
Packaging Weight PL1	1,438
Packaging Weight PL3	5,852
Packaging Weight PL4	586,792
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb