
Product data sheet



GF Uponor S-Press elbow adapter 14-12CU l=150

1014654

- Made of tin-plated brass
- Contoured Aluminium-sleeve with inspection windows
- Fast 3-step installation (press without bevel)
- Colour coded breakaway press indicator
- With copper pipe 15 x 1mm - EN 1057
- Connection of the plated copper pipe can be made using a standard BS EN 1254-2 compression type fitting,
- or a compatible metal press connection.

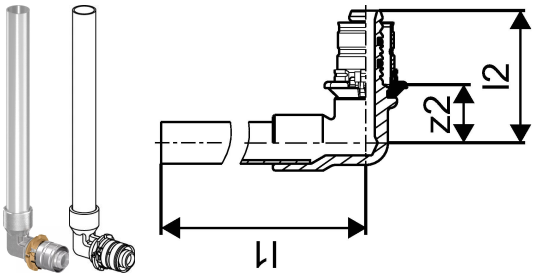

About GF Uponor S-Press elbow adapter

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press elbow adapter 14-12CU l=150

1014654

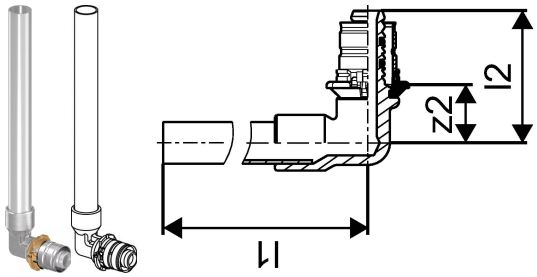

Product code

Item no EAN	4021598302839
Item no GTIN	04021598302839

Dimensions

Item Unit Height	24
Item Unit Length	180
Item Unit Weight	0,094
Item Unit Width	50
Item_UOM	pce

Measurements

Length (l1)	166
Length (l2)	38
Z2	16,7

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905435692
Packaging Height PL1	188
Packaging Length PL1	175
Packaging Material (number) PL1	20
Packaging Material PL1	Corrugated fibreboard
Packaging Material (short) PL1	PAP
Packaging Quantity PL1	20
Packaging Type PL1	Base_Box
Packaging Volume PL1	0,002961
Packaging Weight PL1	1,93

Packaging Width PL1	90

Technical data

Recycling Text Block PL1	Corrugated fibreboard

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+