


Uponor S-Press tee reducer 14-16-14

1014888

- Made of tin-plated brass
- Contoured Aluminium-sleeve
- Fast 3-step installation (press without bevel)
- Colour code

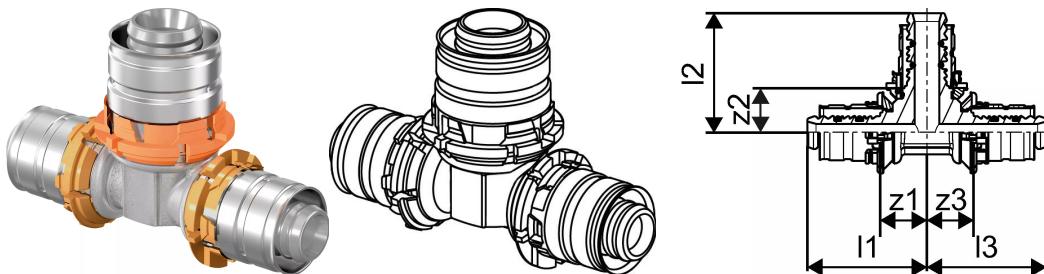

About Uponor S-Press tee reducer

Specification

- with fixed press sleeve
- stop ring
- test safety

Application


- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)
- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar
- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.
- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'
- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass
- if not different mentioned:
 - Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC
- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC
- KIWA – UK water Regulation 4
- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001

Uponor S-Press tee reducer 14-16-14

1014888

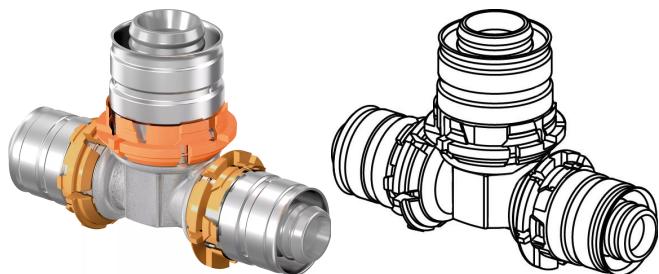

Product code

Item no EAN 4021598301313

Item no GTIN 04021598301313

Dimensions

Item Unit Height 16

Item Unit Length 72

Item Unit Weight 0,07

Item Unit Width 47

Item_UOM pce

Measurements

Length (I1) 35

Length (I2) 35

Length (I3) 35

z1 13,7

Z2 13

Z3 13,7

Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1 06414905435937

Packaging GTIN PL3 06414905445813

Packaging GTIN PL4 06414905489442

Packaging Height PL1 89

Packaging Height PL3 188

Packaging Height PL4 564

Packaging Length PL1 176

Packaging Length PL3 277

Packaging Length PL4 1120

Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,47249664
Packaging Weight PL1	0,737
Packaging Weight PL3	6,026
Packaging Weight PL4	292,008
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	748

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb