


Uponor S-Press tee reducer 16-14-16

1014915

- Made of tin-plated brass
- Contoured Aluminium-sleeve with inspection windows
- Fast 3-step installation (press without bevel)
- Colour coded, breakaway press indicator

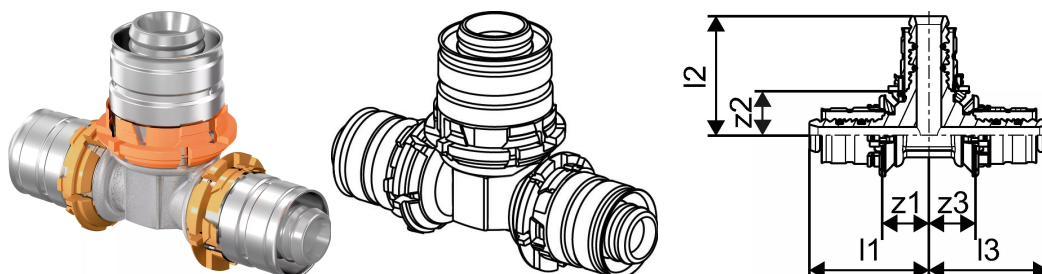

About Uponor S-Press tee reducer

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press tee reducer 16-14-16

1014915

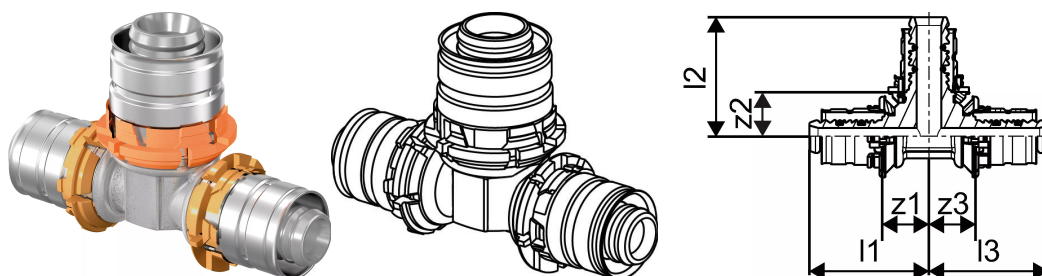

Product code

Item no EAN 4021598301337

Item no GTIN 04021598301337

Dimensions

Item Unit Height 45

Item Unit Length 73

Item Unit Weight 0,072

Item Unit Width 15

Item_UOM pce

Measurements

Length (l1) 35

Length (l2) 35

Length (l3) 35

z1 13,7

z2 13,7

z3 13,7

Packaging

Packaging GTIN PL1 06414905435951

Packaging GTIN PL3 06414905445837

Packaging GTIN PL4 06414905489466

Packaging Height PL1 89

Packaging Height PL3 188

Packaging Height PL4 680

Packaging Length PL1 176

Packaging Length PL3 277

Packaging Length PL4 1200

Packaging Quantity PL1 10

Packaging Quantity PL3 80

Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,757
Packaging Weight PL3	6,186
Packaging Weight PL4	322,6
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

[Download documents here](#) 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb