Product data sheet





GF Uponor S-Press tee reduced 16-14-16

1014915

- Made of tin-plated brass
- Contoured Aluminium-sleeve with inspection windows
- Fast 3-step installation (press without bevel)
- Colour coded, breakaway press indicator





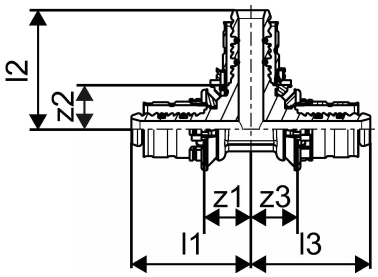

About GF Uponor S-Press tee reduced

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval
- WRAS or
- KIWA


To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee reduced 16-14-16

1014915





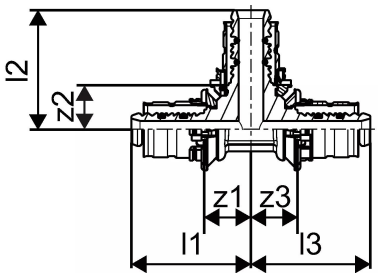

Product code

Item no EAN	4021598301337
Item no GTIN	04021598301337

Dimensions

Item Unit Height	45
Item Unit Length	73
Item Unit Weight	0,072
Item Unit Width	15
Item_UOM	pce

Measurements

Length (l1)	35
Length (l2)	35
Length (l3)	35
z1	13,7
Z2	13,7
Z3	13,7

Packaging

Packaging GTIN PL1	06414905435951
Packaging GTIN PL3	06414905445837
Packaging GTIN PL4	06414905489466
Packaging Height PL1	89
Packaging Height PL3	188
Packaging Height PL4	680
Packaging Length PL1	176
Packaging Length PL3	277
Packaging Length PL4	1200

Packaging Quantity PL1	10
Packaging Quantity PL3	80
Packaging Quantity PL4	3840
Packaging Type PL1	Base_Box
Packaging Type PL3	Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,001049488
Packaging Volume PL3	0,009321604
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,757
Packaging Weight PL3	6,186
Packaging Weight PL4	322,6
Packaging Width PL1	67
Packaging Width PL3	179
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+