


Uponor Minitec compression coupling 9,9-9,9

1016690

- Made of brass
- Screw

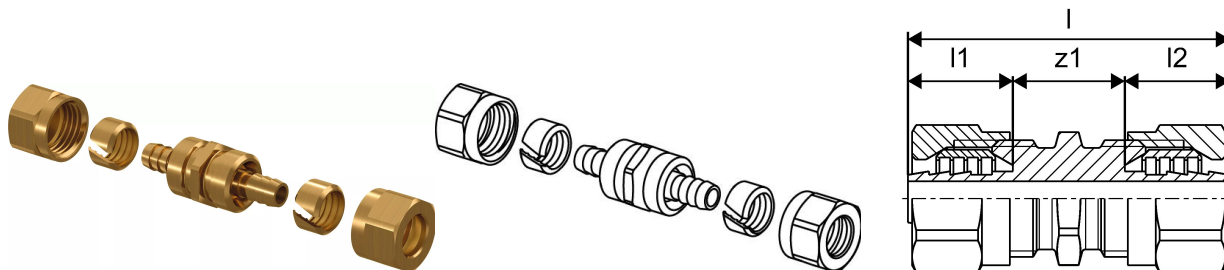

About Uponor Minitec compression coupling

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- for use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- EN 13501-1 fire classification: class E.
- standard flammability, building-material class B2, conforming to DIN 4102.
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application


- radiant underfloor heating and cooling
- very low construction height
- for use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

Uponor Minitec compression coupling 9,9-9,9

1016690

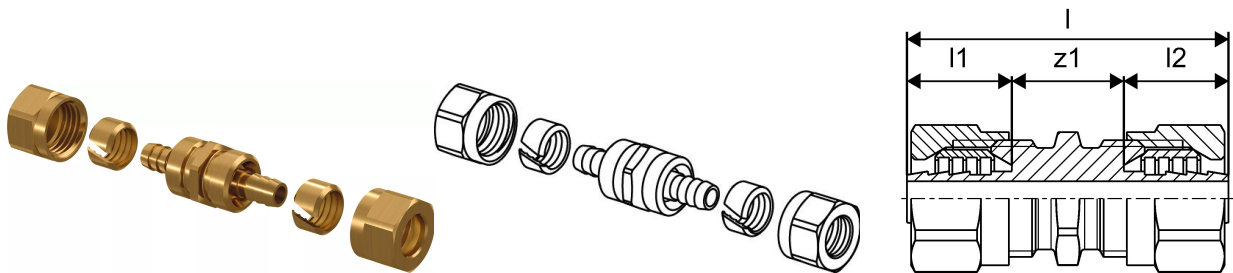

Technical data

Item (unit of measurement)	pce
Item no VVS	045467909
Length (l)	46 mm
Length (l1)	15 mm
Length (l2)	15 mm
Packaging Quantity PL1	12
Packaging Quantity PL3	48

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb