


Uponor Minitec compression coupling 9,9-9,9

1016690

- Made of brass
- Screw

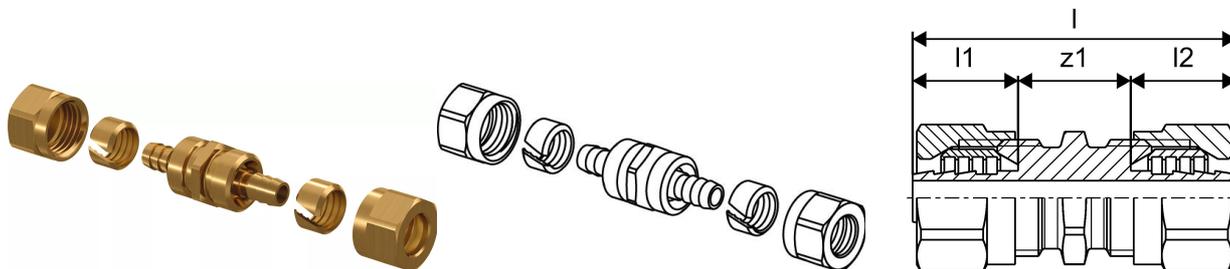

About Uponor Minitec compression coupling

Specification

- Minitec underfloor heating system for fixation on solid floors or specified insulation materials
- Designed as sturdy pipe fixing system of minimum height, with integrated pipe laying channels for correct pipe laying distances
- For use with Uponor Minitec PE-Xa pipes 9.9 x 1.1 mm; allowing for straight and diagonal pipe laying
- Fire class E to BS EN 13501-1 (pipe and panels)
- Pipe spacing: Vz 5, 10, 15
- Net surface with overlapping nubs: 0,77m²

Application


- Radiant underfloor heating and cooling
- Very low construction height
- For use with qualified filler materials

Certification

- DIN CERTCO: 7F170-F

Uponor Minitec compression coupling 9,9-9,9

1016690

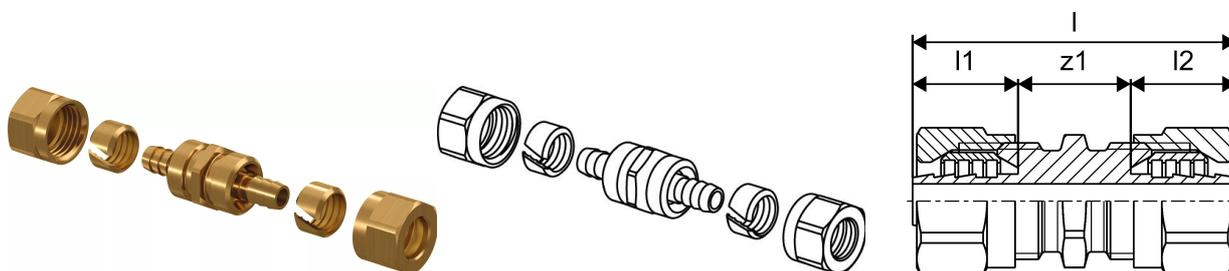

Product code

Item no EAN	6414905515837
Item no GTIN	06414905515837
Item no VVS	045467909

Dimensions

Item Unit Height	45
Item Unit Length	19
Item Unit Weight	0,07
Item Unit Width	19
Item_UOM	pce

Measurements

LENGTH_L	46
Length (l1)	15
Length (l2)	15
z1	16

Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905437047
Packaging GTIN PL3	06414905665235
Packaging Height PL1	40
Packaging Height PL3	89
Packaging Length PL1	120
Packaging Length PL3	176
Packaging Quantity PL1	12
Packaging Quantity PL3	48
Packaging Type PL1	Plastic_Bag
Packaging Type PL3	Box

Packaging Volume PL1	0,000336
Packaging Volume PL3	0,00211464
Packaging Weight PL1	0,842
Packaging Weight PL3	3,43
Packaging Width PL1	70
Packaging Width PL3	135

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb