

## Uponor Ecoflex Thermo Single 25x2,3/140

**1018109**

- Heating and cooling
- One carrier pipe PE-Xa, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing



### About Uponor Ecoflex Thermo Single

#### Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

#### Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

#### Certification

-

## Uponor Ecoflex Thermo Single 25x2,3/140

1018109

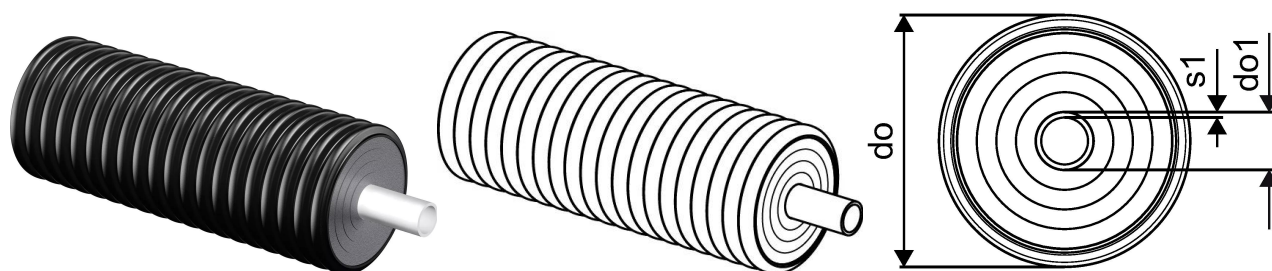

### Measurements

Bending radius M	0,25
Outer Diameter_do	140
Outer Diameter_do1	25
Wall thickness_s1	2,3

### Product code

Item no EAN	6414905200252
Item no GF	35001018109
Item no GTIN	06414905200252
Item no LVI	3010212
Item no VVS	087807025

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,18
Item Unit Width	140
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437115
Packaging Height PL1	2200
Packaging Length PL1	1500
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	236
Packaging Width PL1	2200

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)