

## Uponor Ecoflex Thermo Pipe Single 32x2,9/140

**1018110**

- Heating and cooling
- One carrier pipe PE-Xa, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing



### About Uponor Ecoflex Thermo Pipe Single

#### Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

#### Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

#### Certification

-

## Uponor Ecoflex Thermo Pipe Single 32x2,9/140

1018110

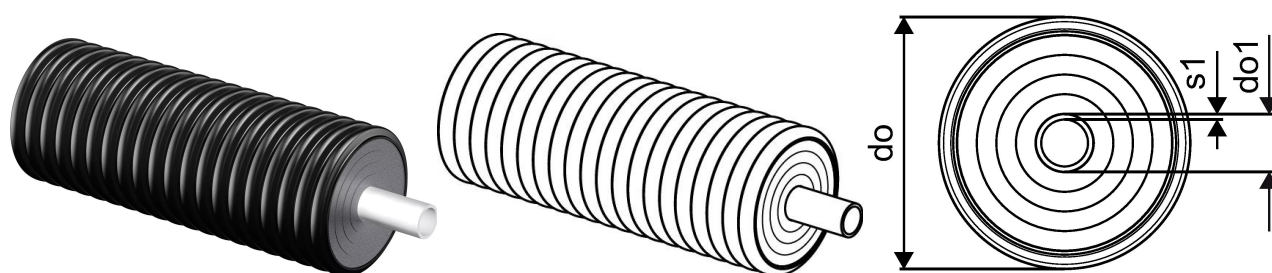

### Measurements

Bending radius M	0,3
Outer Diameter_do	140
Outer Diameter_do1	32
Wall thickness_s1	2,9

### Product code

Item no EAN	6414905200351
Item no GF	35001018110
Item no GTIN	06414905200351
Item no LVI	3010213
Item no VVS	087807032

### Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,31
Item Unit Width	140
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437122
Packaging Height PL1	2200
Packaging Length PL1	1500
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	262
Packaging Width PL1	2200

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavillion  
WD18 8GA, Watford  
UK

T +44 (0)1923 381212

E  
customerservice.uk.bfs@georgfi  
scher.com