


Uponor Ecoflex Thermo Single 75x6,8/200

1018114

- Heating and cooling
- One carrier pipe PE-Xa, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

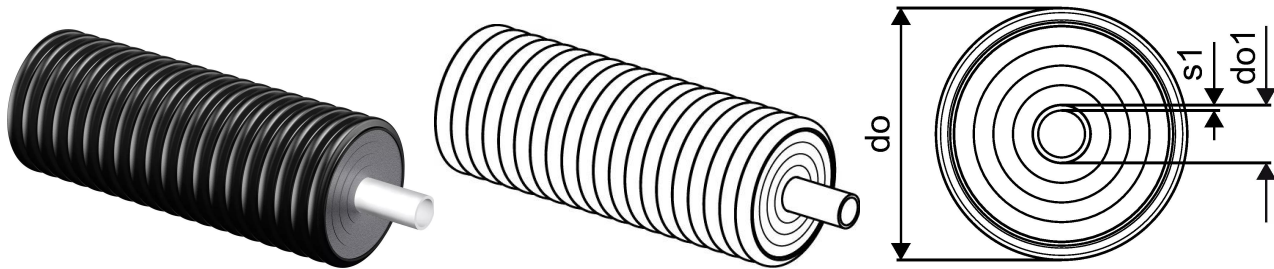

About Uponor Ecoflex Thermo Single

Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

Application

- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

Certification

-

Uponor Ecoflex Thermo Single 75x6,8/200

1018114



Measurements

| | |
|--------------------|-----|
| Bending radius M | 0,8 |
| Outer Diameter_do | 200 |
| Outer Diameter_do1 | 75 |
| Wall thickness_s1 | 6,8 |

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905200719 |
| Item no GF | 35001018114 |
| Item no GTIN | 06414905200719 |
| Item no LVI | 3010207 |
| Item no NOBB | 41945305 |
| Item no NRF | 8360514 |
| Item no RSK | 2190417 |
| Item no VVS | 087807075 |

Dimensions

| | |
|------------------|------|
| Item Unit Height | 200 |
| Item Unit Length | 1000 |
| Item Unit Weight | 3,74 |
| Item Unit Width | 200 |
| Item_UOM | m |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905437160 |
| Packaging Height PL1 | 2400 |
| Packaging Length PL1 | 1400 |
| Packaging Quantity PL1 | 100 |
| Packaging Type PL1 | Coil |
| Packaging Volume PL1 | 8,064 |
| Packaging Weight PL1 | 374 |

Packaging Width PL1

2400

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb