


## Uponor Ecoflex Thermo Single 110x10,0/200

**1018116**

- Warm tap water
- One carrier pipe PE-Xa, SDR 11
- Max. load 10 bar / 80°C
- PEX foam, HDPE casing

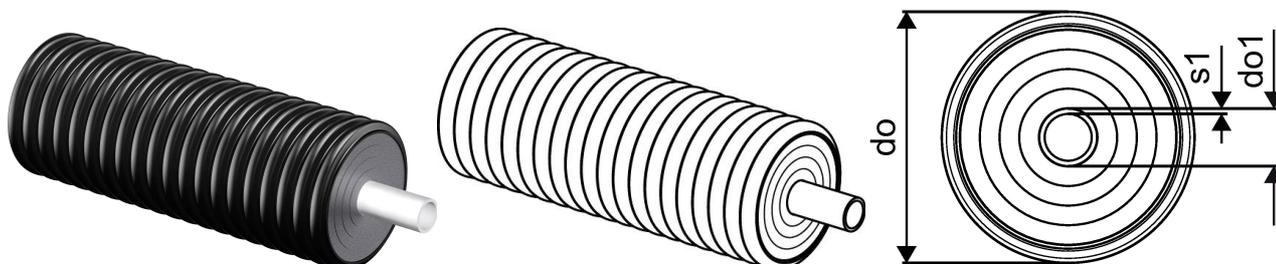

### About Uponor Ecoflex Thermo Single

#### Specification

- Heating and Cooling
- Single PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

#### Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

#### Certification

- Approvals should be checked by local responsible person

## Uponor Ecoflex Thermo Single 110x10,0/200

1018116

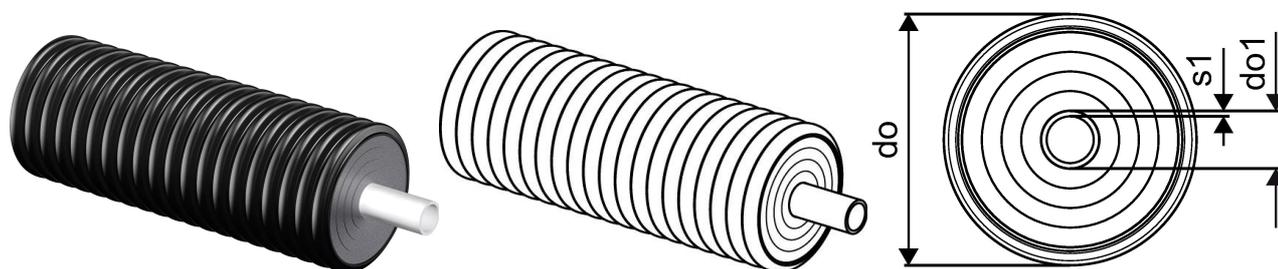

### Measurements

Bending radius M	1,2
Outer Diameter_do	200
Outer Diameter_do1	110
Wall thickness_s1	10

### Product code

Item no EAN	6414905201105
Item no GF	35001018116
Item no GTIN	06414905201105
Item no LVI	3010210
Item no NOBB	41945324
Item no NRF	8360516
Item no RSK	2190419
Item no VVS	087807091

### Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	5,24
Item Unit Width	200
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437184
Packaging Height PL1	2400
Packaging Length PL1	1400
Packaging Quantity PL1	100
Packaging Type PL1	Coil
Packaging Volume PL1	8,064
Packaging Weight PL1	524

Packaging Width PL1

2400

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)