


Uponor Ecoflex Aqua Pipe Single 32x4,4/140

1018118

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- PEX foam, HDPE casing

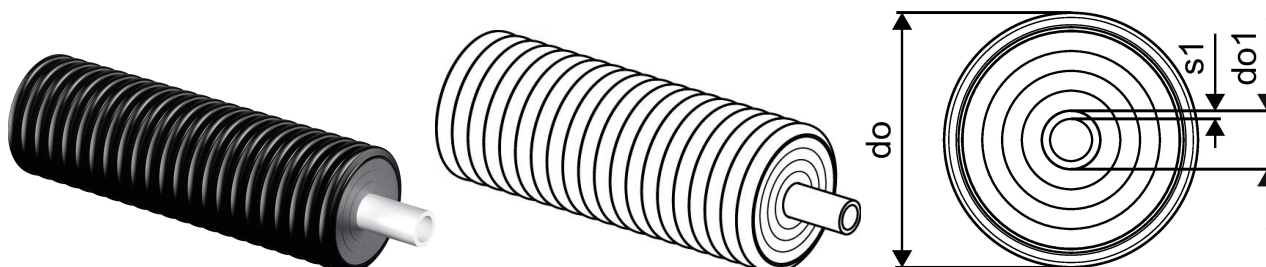

About Uponor Ecoflex Aqua Pipe Single

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural Coloured, PN 10 (SDR 7,4)
- Insulating material: Permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- UK Reg4 approval
 - WRAS or
 - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor Ecoflex Aqua Pipe Single 32x4,4/140

1018118



Measurements

Bending radius M	0,4
Outer Diameter_do	140
Outer Diameter_do1	32
Wall thickness_s1	4,4

Product code

Item no EAN	6414905202157
Item no GF	35001018118
Item no GTIN	06414905202157
Item no LVI	3010113
Item no NOBB	41945381
Item no NRF	8360532
Item no RSK	2190565
Item no VVS	087361632

Dimensions

Item Unit Height	140
Item Unit Length	1000
Item Unit Weight	1,42
Item Unit Width	140
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437207
Packaging Height PL1	2200
Packaging Length PL1	1500
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	7,26
Packaging Weight PL1	284

Packaging Width PL1

2200

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212

E
customerservice.uk.bfs@georgfi
scher.com