


## Uponor Ecoflex Aqua Single 40x5,5/175

**1018119**

- Warm tap water
- One medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- PEX foam, HDPE casing

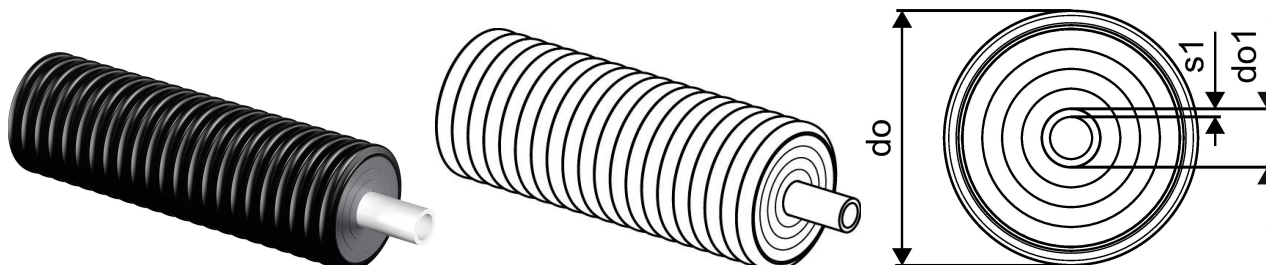

### About Uponor Ecoflex Aqua Single

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural Coloured, PN 10 (SDR 7,4)
- Insulating material: Permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

#### Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

- UK Reg4 approval
  - WRAS or
  - KIWA
- To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Ecoflex Aqua Single 40x5,5/175

1018119

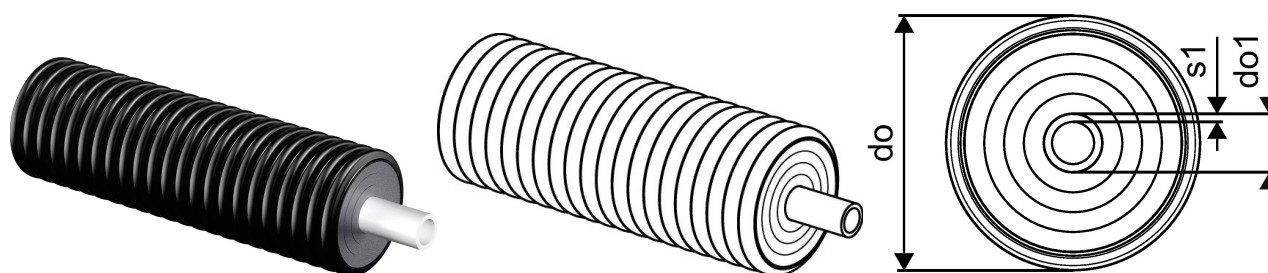

### Measurements

Bending radius M	0,45
Outer Diameter_do	175
Outer Diameter_do1	40
Wall thickness_s1	5,5

### Product code

Item no EAN	6414905202256
Item no GF	35001018119
Item no GTIN	06414905202256
Item no LVI	3010114
Item no NOBB	41945396
Item no NRF	8360533
Item no RSK	2190566
Item no VVS	087361640

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,2
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437214
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368
Packaging Weight PL1	440

Packaging Width PL1

2400

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)