


## Uponor Ecoflex Thermo Pipe mini 25x2,3/68

1018132

- Heating and Cooling
- One medium pipe PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

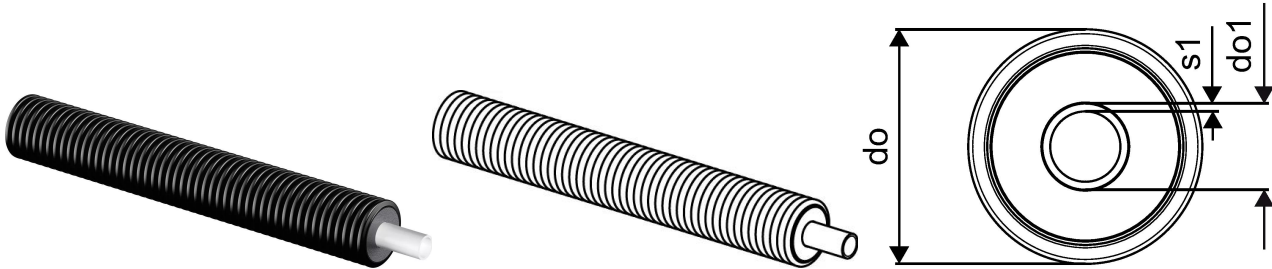

### About Uponor Ecoflex Thermo Pipe mini

#### Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

#### Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

#### Certification

-

## Uponor Ecoflex Thermo Pipe mini 25x2,3/68

1018132

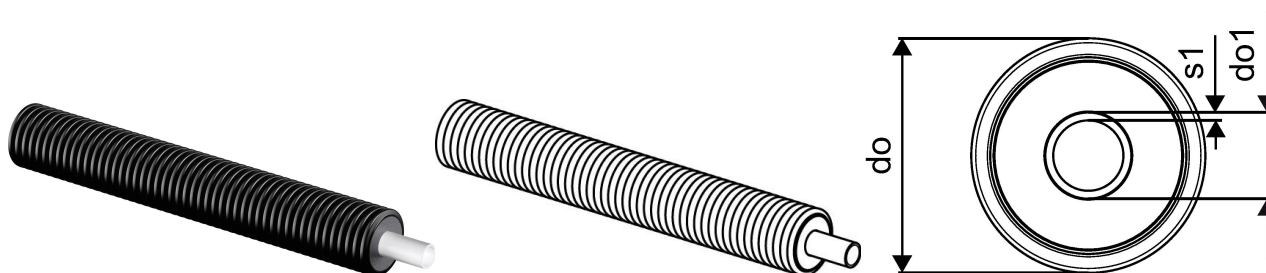

### Measurements

Bending radius M	0,2
Outer Diameter_do	68
Outer Diameter_do1	25
Wall thickness_s1	2,3

### Product code

Item no EAN	6414905203215
Item no GF	35001018132
Item no GTIN	06414905203215

### Dimensions

Item Unit Height	68
Item Unit Length	1000
Item Unit Weight	0,5
Item Unit Width	68
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437344
Packaging Height PL1	1600
Packaging Length PL1	740
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	1,8944
Packaging Weight PL1	100
Packaging Width PL1	1600

### Technical documents

Download documents here

schcer.com

orgfi