


## Uponor Ecoflex Thermo Pipe Twin 2x25x2,3/175

1018134

- Heating and Cooling
- Two carrier pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- Coloured centre profile to identify flow and return lines
- PE-X foam, HDPE casing

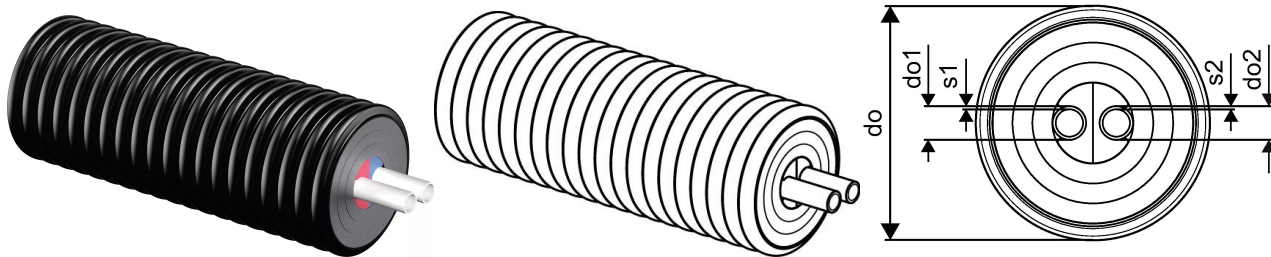

### About Uponor Ecoflex Thermo Pipe Twin

#### Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

#### Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

#### Certification

-

## Uponor Ecoflex Thermo Pipe Twin 2x25x2,3/175

1018134

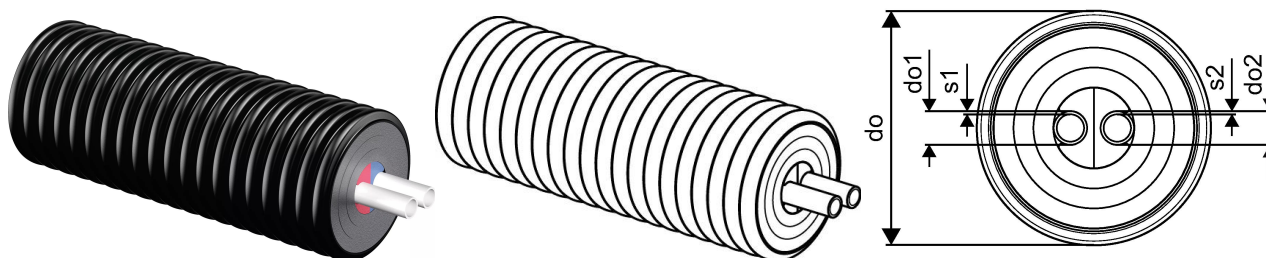

### Measurements

Bending radius M	0,5
Outer Diameter_do	175
Outer Diameter_do1	25
Outer Diameter_do2	25
Wall thickness_s1	2,3
Wall thickness_s2	2,3

### Product code

Item no EAN	6414905210251
Item no GF	35001018134
Item no GTIN	06414905210251
Item no LVI	3010232
Item no NRF	8360502
Item no RSK	2190561
Item no VVS	087809025

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	1,92
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437368
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368

Packaging Weight PL1	384
Packaging Width PL1	2400

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)