


Uponor Ecoflex Thermo Twin 2x32x2,9/175

1018135

- Heating and Cooling
- Two carrier pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- Coloured centre profile to identify flow and return lines
- PE-X foam, HDPE casing

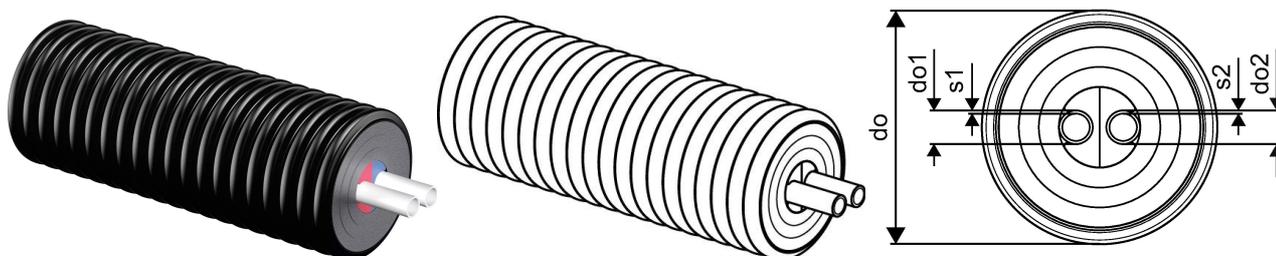

About Uponor Ecoflex Thermo Twin

Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

Certification

-

Uponor Ecoflex Thermo Twin 2x32x2,9/175

1018135

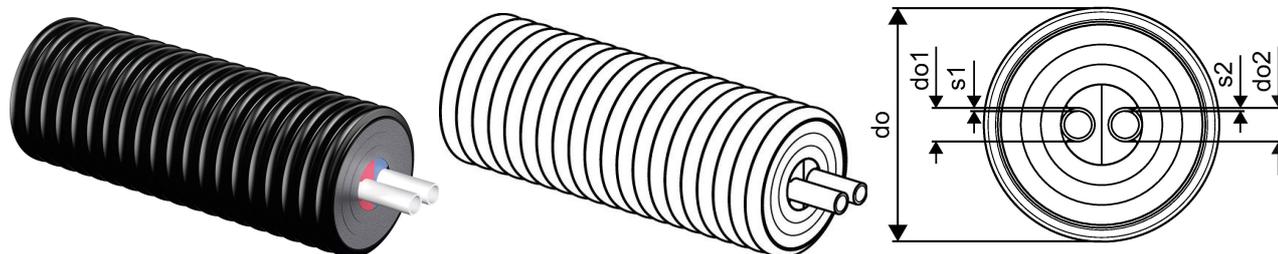

Measurements

Bending radius M	0,6
Outer Diameter_do	175
Outer Diameter_do1	32
Outer Diameter_do2	32
Wall thickness_s1	2,9
Wall thickness_s2	2,9

Product code

Item no EAN	6414905210350
Item no GF	35001018135
Item no GTIN	06414905210350
Item no LVI	3010233
Item no NOBB	41945237
Item no NRF	8360503
Item no RSK	2190562
Item no VVS	087809032

Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	1,99
Item Unit Width	175
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437375
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil

Packaging Volume PL1	10,368
Packaging Weight PL1	398
Packaging Width PL1	2400

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb