


Uponor Ecoflex Thermo Pipe Twin 2x63x5,8/200

1018138

- Heating and Cooling
- Two carrier pipes PE-Xa with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- Coloured centre profile to identify flow and return lines
- PE-X foam, HDPE casing

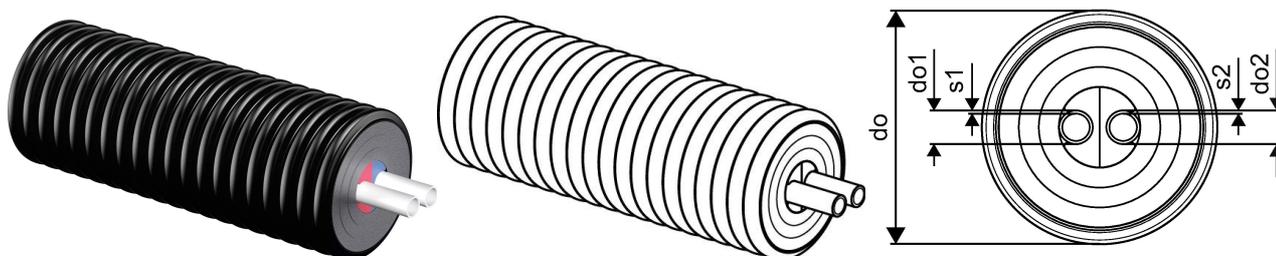

About Uponor Ecoflex Thermo Pipe Twin

Specification

- Heating and Cooling
- PE-Xa carrier pipe with oxygen barrier, SDR 11
- Max. load 6 bar / 80°C
- PEX foam, HDPE casing

Application


- Buried services for the transport of heating or cooling water.
- Heating operating temperature 80°C based on BS EN 15632

Certification

-

Uponor Ecoflex Thermo Pipe Twin 2x63x5,8/200

1018138

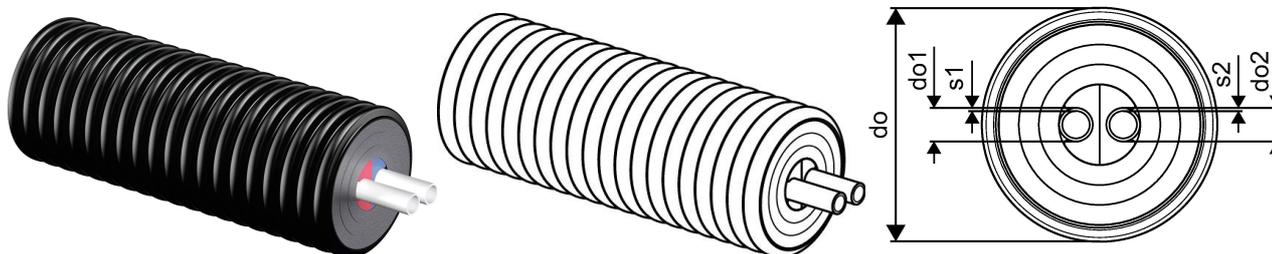

Measurements

Bending radius M	1,2
Outer Diameter_do	200
Outer Diameter_do1	63
Outer Diameter_do2	63
Wall thickness_s1	5,8
Wall thickness_s2	5,8

Product code

Item no EAN	6414905210718
Item no GF	35001018138
Item no GTIN	06414905210718
Item no LVI	3010227
Item no NOBB	41945260
Item no NRF	8360506
Item no RSK	2190424
Item no VVS	087809063

Dimensions

Item Unit Height	200
Item Unit Length	1000
Item Unit Weight	4,55
Item Unit Width	200
Item_UOM	m

Packaging

Packaging GTIN PL1	06414905437405
Packaging Height PL1	2400
Packaging Length PL1	1400
Packaging Quantity PL1	100
Packaging Type PL1	Coil

Packaging Volume PL1	8,064
Packaging Weight PL1	455
Packaging Width PL1	2400

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb