


Uponor Ecoflex Aqua Twin 25x3,5-25x3,5/175

1018139

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 95°C
- PEX foam, HDPE casing
- Coloured centre profil to avoid confusion of supply and circulation

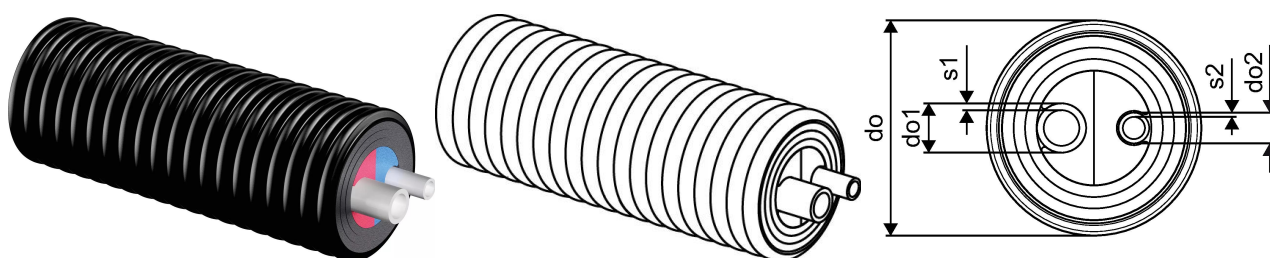

About Uponor Ecoflex Aqua Twin

Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) pipe based on EN ISO 15875, natural coloured, PN 10 (SDR 7,4)
- Insulating material: closed-cell PE-X foam, permanently elastic, ageing-resistant
- Casing pipe: Corrugated polyethylene (HDPE)

Application


- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on EN 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

Certification

- Approval should be checked by local responsible person

Uponor Ecoflex Aqua Twin 25x3,5-25x3,5/175

1018139

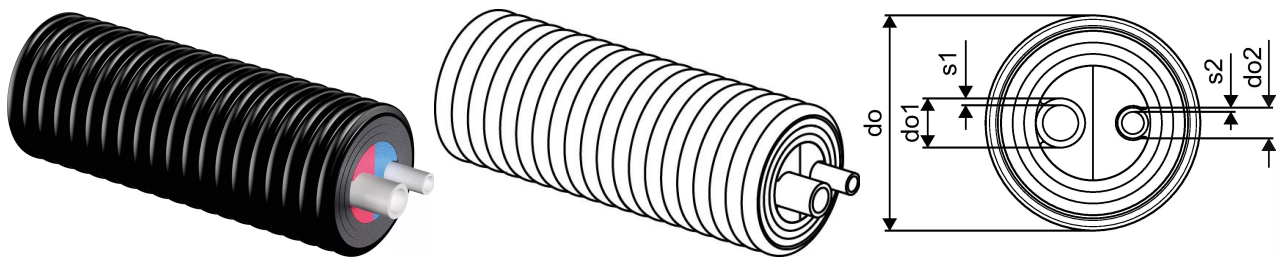

Technical data

| | |
|----------------------------|-----------|
| Item (unit of measurement) | m |
| Item no VVS | 087363825 |
| Bending radius 2 | 0,65 m |
| Packaging Quantity PL1 | 200 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb