


## Uponor Ecoflex Aqua Twin 25x3,5-25x3,5/175

**1018139**

- Warm tap water with circulation
- Two medium pipe PE-Xa, SDR 7,4
- Max. load 10 bar / 70°C
- PEX foam, HDPE casing
- Coloured centre profile to identify supply and return lines

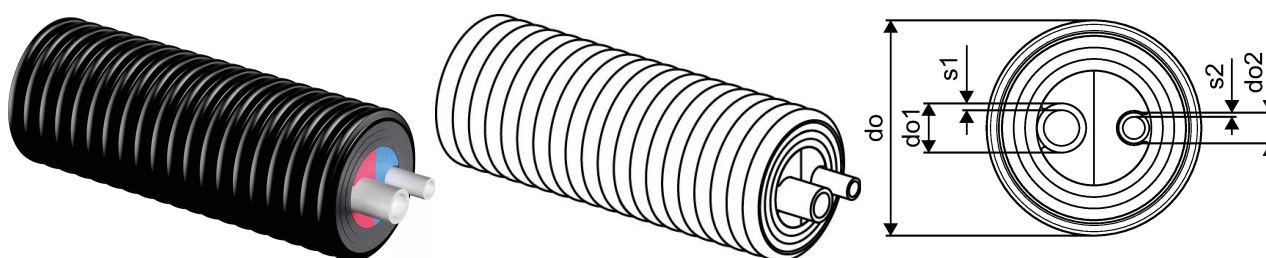

### About Uponor Ecoflex Aqua Twin

#### Specification

- Flexible, pre-insulated, self-compensating plastic pipe system.
- Medium pipe: cross-linked polyethylene (PE-Xa) manufactured to BS EN ISO 15875, natural Coloured, PN 10 (SDR 7,4)
- Insulating material: Permanently elastic closed-cell PE-X foam.
- Casing pipe: UV stabilised, corrugated polyethylene (HDPE)
- Twin pipe: colour coded identification to identify supply and return lines

#### Application

- Transport of warm tap water for buried installations.
- Tap water operating temperature 70°C based on BS EN ISO 15875
- Malfunction temperature 95°C
- Static verification for heavy traffic load of 60 tons

#### Certification

UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor Ecoflex Aqua Twin 25x3,5-25x3,5/175

1018139



### Measurements

Bending radius M	0,65
Outer Diameter_do	175
Outer Diameter_do1	25
Outer Diameter_do2	25
Wall thickness_s1	3,5
Wall thickness_s2	3,5

### Product code

Item no EAN	4021598111721
Item no GF	35001018139
Item no GTIN	04021598111721
Item no VVS	087363825

### Dimensions

Item Unit Height	175
Item Unit Length	1000
Item Unit Weight	2,05
Item Unit Width	175
Item_UOM	m

### Packaging

Packaging GTIN PL1	06414905437412
Packaging Height PL1	2400
Packaging Length PL1	1800
Packaging Quantity PL1	200
Packaging Type PL1	Coil
Packaging Volume PL1	10,368
Packaging Weight PL1	410
Packaging Width PL1	2400

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)