Product data sheet





GF Uponor Ecoflex chamber 6x140/175/200

1018326

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load possible with special concrete construction



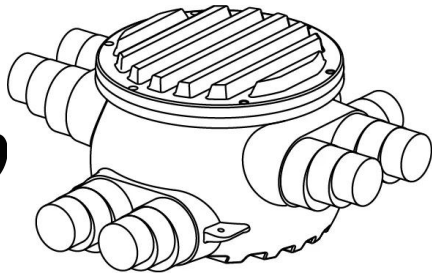



About GF Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application

- Ecoflex accessories are designed for all below ground buried installations


Certification


-

GF Uponor Ecoflex chamber 6x140/175/200

1018326



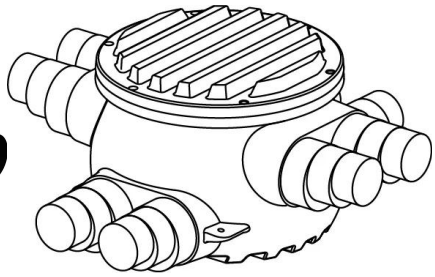



Measurements

Inner_diameter_di	760
LENGTH_L	1652
Length (l1)	1316
Outer Diameter_do	940
Z Measurement b	300
Z Measurement h	725
Z Measurement h1	420
Z Measurement h2	200

Product code

Item no EAN	6414905230020
Item no GF	35001018326
Item no GTIN	06414905230020
Item no LVI	3010807
Item no NOBB	41945744
Item no NRF	8360631
Item no RSK	2190554
Item no VVS	087918006

Dimensions

Item Unit Height	725
Item Unit Length	1652
Item Unit Weight	51
Item Unit Width	1316
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900324847

Packaging GTIN PL4	06414905490677
Packaging Height PL4	2300
Packaging Length PL4	1650
Packaging Quantity PL4	3
Packaging Type PL4	Pallet
Packaging Volume PL4	5,0094
Packaging Weight PL4	178
Packaging Width PL4	1320

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+