


Uponor Ecoflex chamber 8x140/175/200

1018327

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load with special concret construction possible

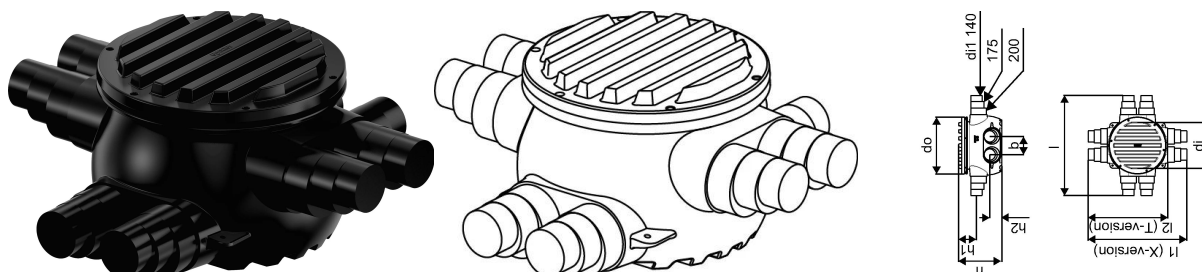

About Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed to complete the assortment in buried installation.

Certification

- Approvals should be checked by local responsible person

Uponor Ecoflex chamber 8x140/175/200

1018327

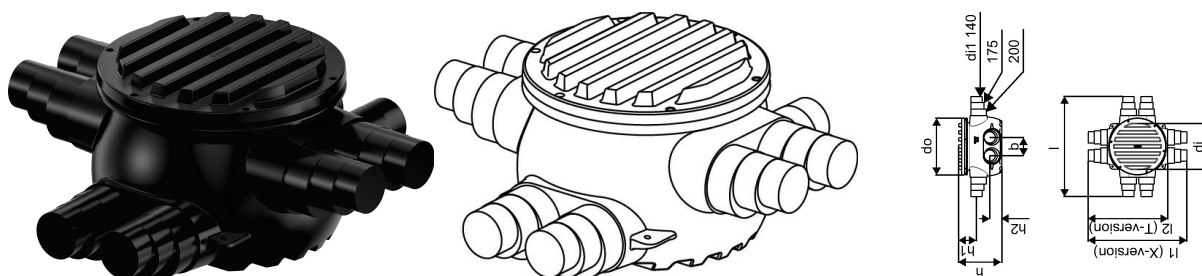

Technical data

Item (unit of measurement)	pce
Item no VVS	087918008
Item no LVI	3010808
Item no NRF	8360632
Length (l)	1652 mm
Length (l1)	1632 mm
Z-measurement b	300 mm
Z-measurement h	725 mm
Z-measurement h1	420 mm
Z-measurement h2	200 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	3

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb