


Uponor Ecoflex chamber 8x140/175/200

1018327

- Chamber for connecting the casing pipe
- PE body with insulation and reducer spigots
- T and X models available
- Traffic load of 500 kg, higher load possible with special concrete construction

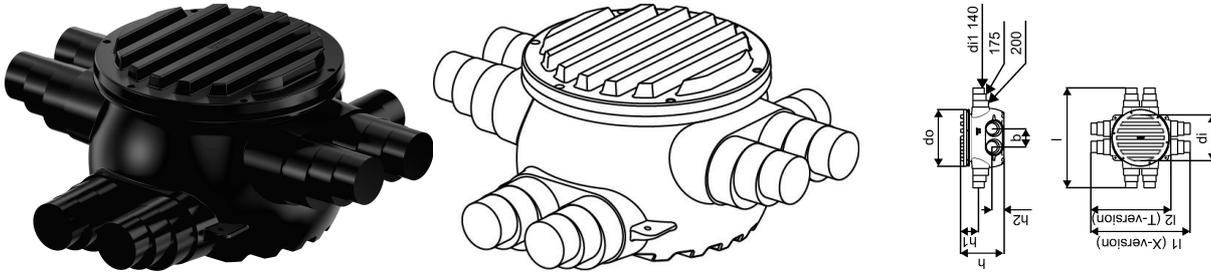

About Uponor Ecoflex chamber

Specification

- All accessories are corrosion resistant.

Application


- Ecoflex accessories are designed for all below ground buried installations

Certification

-

Uponor Ecoflex chamber 8x140/175/200

1018327

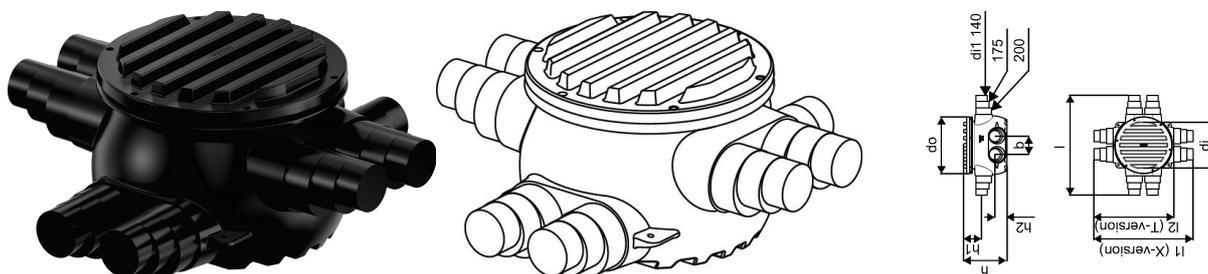

Measurements

Inner_diameter_di	760
LENGTH_L	1652
Length (l1)	1632
Outer Diameter_do	940
Z Measurement b	300
Z Measurement h	725
Z Measurement h1	420
Z Measurement h2	200

Product code

Item no EAN	6414905230037
Item no GF	35001018327
Item no GTIN	06414905230037
Item no LVI	3010808
Item no NOBB	41945752
Item no NRF	8360632
Item no RSK	2190553
Item no VVS	087918008

Dimensions

Item Unit Height	725
Item Unit Length	1652
Item Unit Weight	54
Item Unit Width	1632
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414900324861
Packaging GTIN PL4	06414905490684
Packaging Height PL4	2300

Packaging Length PL4	1650
Packaging Quantity PL4	3
Packaging Type PL4	Pallet
Packaging Volume PL4	6,26175
Packaging Weight PL4	187
Packaging Width PL4	1650

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb