


## Uponor Wipex reducer male x female G1 1/2-G1 1/4

1018369

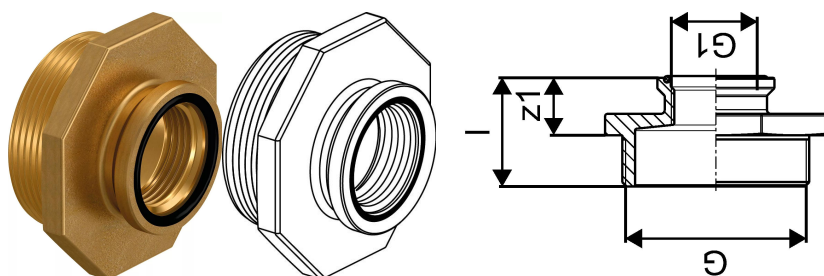

### About Uponor Wipex reducer male x female

#### Specification

- Wipex fittings in corrosion-resistant brass, dezincification based on EN ISO 6509 with stainless steel screw.
- O-ring sealing between Wipex coupling and base fitting connectors
- Bolt set for couplers include a hex socket bolt in stainless steel and the nut as well as washer from brass
- Pre-open sleeve design with assembled support part for the dimension 63-110mm.


#### Application

- Fittings for pipe systems Thermo, Aqua, Quattro, Supra, Supra PLUS and Supra Standard
- Connection of PE and PE-Xa medium pipe to couplers with cylindrical inch male thread
- Max. operating temperature 95°C

#### Certification

- Approvals should be checked by local responsible person

Uponor Wipex reducer male x female G1 1/2-G1 1/4  
1018369

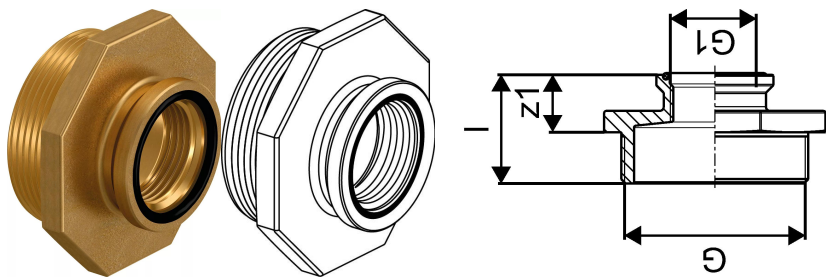

Technical data

Item (unit of measurement)	pce
Item no VVS	089770603
Item no NRF	8360732
Length (l)	39 mm
Packaging Quantity PL1	1
Packaging Quantity PL3	25
Packaging Quantity PL4	2400

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E enquiries.uk@uponor.com

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)