


Uponor Comfort Pipe PLUS insulated 13mm 20x2,0 60m

1020543

- 6 bar at 80°C
- 13 mm insulation $\lambda=0,037$ W/mK

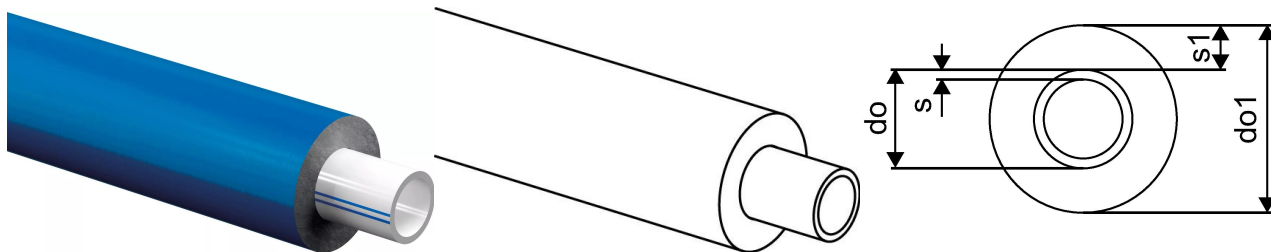

About Uponor Comfort Pipe PLUS insulated 13mm

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. BS EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire class E according to BS EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 80°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS insulated 13mm 20x2,0 60m

1020543

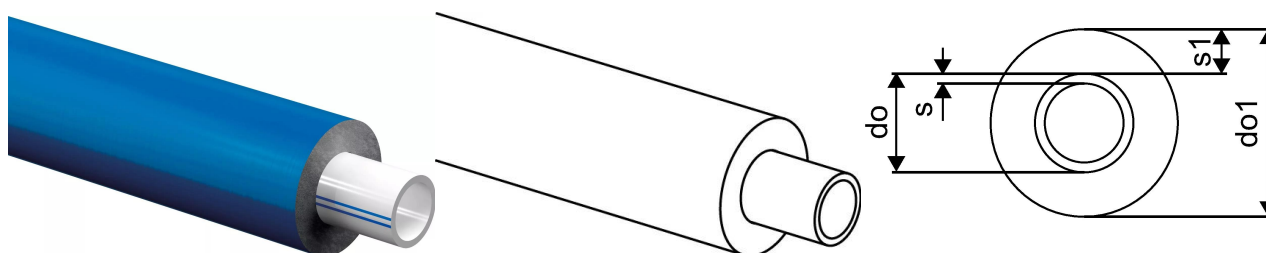

Product code

Item no EAN	6414905516322
Item no GF	35001020543
Item no GTIN	06414905516322

Dimensions

Item Unit Height	46
Item Unit Length	1000
Item Unit Weight	0,19
Item Unit Width	46
Item_UOM	m

Measurements

Outer Diameter_do	20
Wall thickness_s	2
Wall thickness_s1	13

Packaging

Packaging GTIN PL1	06414905438679
Packaging GTIN PL4	06414900437868
Packaging Height PL1	300
Packaging Height PL4	200
Packaging Length PL1	800
Packaging Length PL4	800
Packaging Quantity PL1	60
Packaging Quantity PL4	480
Packaging Type PL1	Coil
Packaging Type PL4	Pallet
Packaging Volume PL1	0,192
Packaging Volume PL4	0,128
Packaging Weight PL1	11,4

Packaging Weight PL4	108
Packaging Width PL1	800
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb