


Uponor Comfort Pipe PLUS insulated 13mm 20x2,0 60m

1020543

- 6 bar at 90°C
- 13 mm insulation $\lambda=0,037$ W/mK

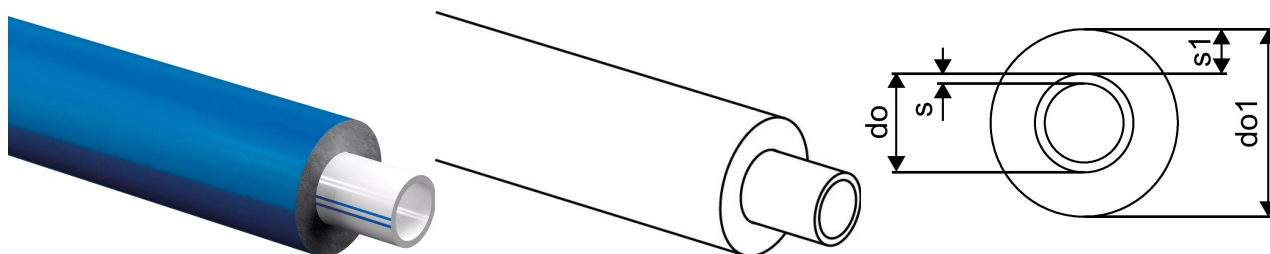

About Uponor Comfort Pipe PLUS insulated 13mm

Specification


- Pipes manufactured from peroxide cross-linked polyethylene (PE-Xa) acc. EN ISO 15875
- EVOH (ethylene vinyl alcohol) layer for oxygen diffusion resistance as per DIN 4726
- 5layer
- Outside white PE layer designed to protect against mechanical damages
- Application class 4/5 - Underfloor heating and low temperature radiators
- Fire classification E according to DIN EN 13501-1.

Application

- Underfloor heating and low temperature radiators
- Heating
- Max design temperature: 90°C
- Malfunction temperature 100°C
- Design pressure 6 Bar at 70°C

Uponor Comfort Pipe PLUS insulated 13mm 20x2,0 60m

1020543

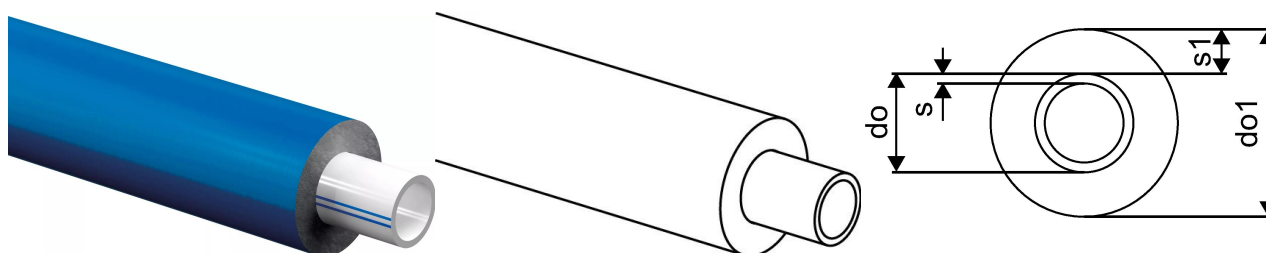

Technical data

Item no EAN	6414905516322
Item no GTIN	06414905516322
Item (unit of measurement)	m
Packaging Quantity 1	60
Packaging Quantity 4	480
Packaging GTIN PL1	06414905438679
Packaging GTIN PL4	06414900437868
Item Unit Height	46 mm
Item Unit Weight	0,19 kg
Item Unit Width	46 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb