


## Uponor RS adapter S-Press 90-RS3

### 1029127

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts.

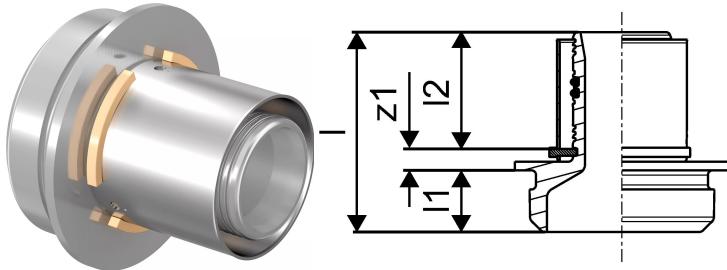

## About Uponor RS adapter S-Press

### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass

if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor RS adapter S-Press 90-RS3

1029127

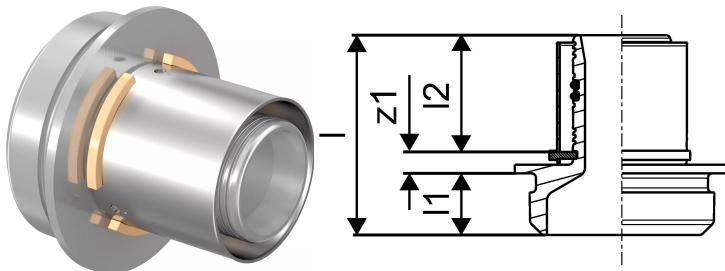

### Product code

Item no EAN 4021598106642

Item no GF 35001029127

Item no GTIN 04021598106642

Item no LVI 1720824

Item no NRF 5071235

Item no RSK 1899489

Item no VVS 045450090

### Dimensions

Item Unit Height 90

Item Unit Length 80

Item Unit Weight 1,337

Item Unit Width 80

Item\_UOM pce

### Measurements

LENGTH\_L 92,6

Length (l1) 20

Length (l2) 62

z1 10,6

### Packaging

Packaging GTIN PL1 06414905439379

Packaging GTIN PL4 06414905491285

Packaging Height PL1 115

Packaging Height PL4 715

Packaging Length PL1 150

Packaging Length PL4 1200

Packaging Quantity PL1 1

Packaging Quantity PL4 240

Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0022425
Packaging Volume PL4	0,6864
Packaging Weight PL1	1,46
Packaging Weight PL4	350,4
Packaging Width PL1	130
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)