


Uponor RS adapter S-Press 90-RS3

1029127

- Made of tin-plated brass
- Inspection windows on press sleeve
- Select the adapter based on the pipe size and then select the corresponding RS2 or RS3 base part.

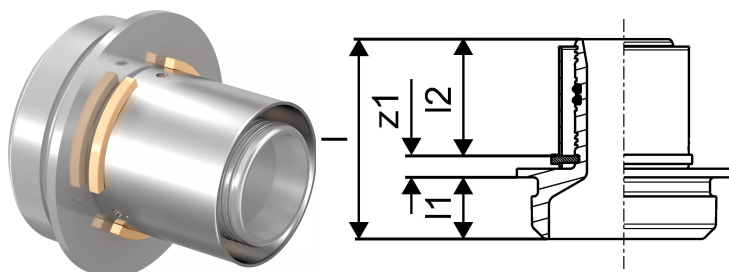

About Uponor RS adapter S-Press

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor RS adapter S-Press 90-RS3

1029127

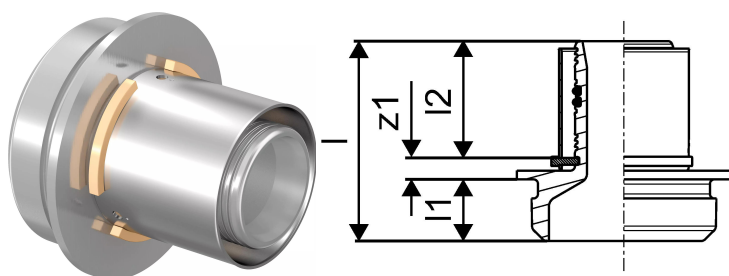

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598106642 |
| Item no GF | 35001029127 |
| Item no GTIN | 04021598106642 |
| Item no LVI | 1720824 |
| Item no NRF | 5071235 |
| Item no RSK | 1899489 |
| Item no VVS | 045450090 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 90 |
| Item Unit Length | 80 |
| Item Unit Weight | 1,337 |
| Item Unit Width | 80 |
| Item_UOM | pce |

Measurements

| | |
|-------------|------|
| LENGTH_L | 92,6 |
| Length (l1) | 20 |
| Length (l2) | 62 |
| z1 | 10,6 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905439379 |
| Packaging GTIN PL4 | 06414905491285 |
| Packaging Height PL1 | 115 |
| Packaging Height PL4 | 715 |
| Packaging Length PL1 | 150 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |
| Packaging Quantity PL4 | 240 |

| | |
|----------------------|-----------|
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,0022425 |
| Packaging Volume PL4 | 0,6864 |
| Packaging Weight PL1 | 1,46 |
| Packaging Weight PL4 | 350,4 |
| Packaging Width PL1 | 130 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb