
Product data sheet



GF Uponor RS adapter S-Press 110-RS3

1029128

- Made of tin-plated brass
- Inspection windows on press sleeve
- Select the adapter based on the pipe size and then select the corresponding RS2 or RS3 base part.

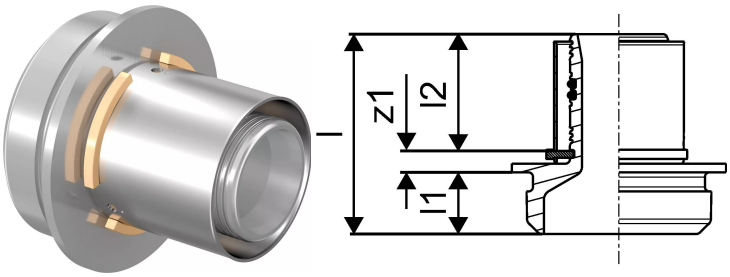

About GF Uponor RS adapter S-Press

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS adapter S-Press 110-RS3

1029128

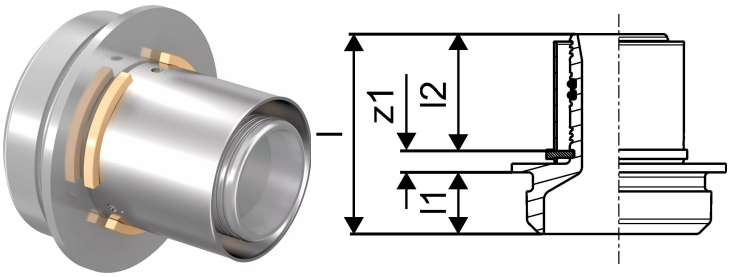

Product code

Item no EAN	4021598106659
Item no GF	35001029128
Item no GTIN	04021598106659
Item no LVI	1720825
Item no NRF	5071236
Item no RSK	1899490
Item no VVS	045450110

Dimensions

Item Unit Height	120
Item Unit Length	94
Item Unit Weight	1,625
Item Unit Width	120
Item_UOM	pce

Measurements

LENGTH_L	92,6
Length (l1)	20
Length (l2)	62
z1	10,6

Packaging

Packaging GTIN PL1	06414905439386
Packaging GTIN PL4	06414905491292
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	150
Packaging Length PL4	1200

Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00232875
Packaging Volume PL4	0,6864
Packaging Weight PL1	1,725
Packaging Weight PL4	414
Packaging Width PL1	135
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+