
Product data sheet




GF Uponor RS flange adapter PN16 RS3-DN100

1029130

- Made of tin-plated brass
- Connects to RS2 or RS3 base parts depending on the flange size or base part size
- Flange PN6/PN16 acc. to BS EN 1092-3
- Bolt circle with 4/8 holes.

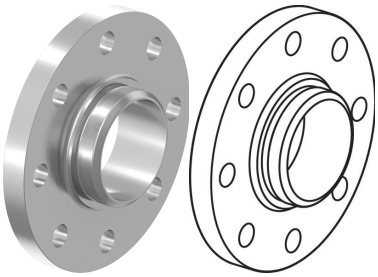

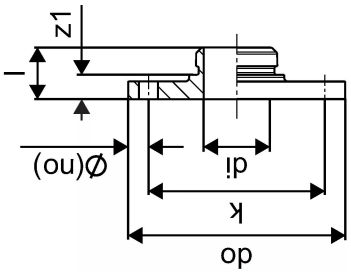

About GF Uponor RS flange adapter PN6

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.


Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA
To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS flange adapter PN16 RS3-DN100

1029130

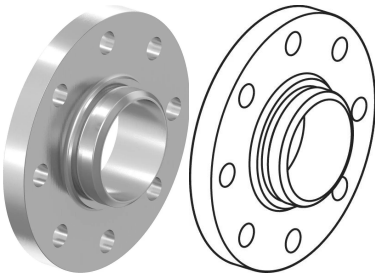

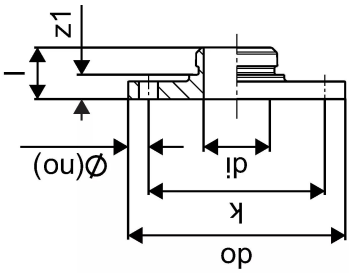

Measurements

Inner_diameter_di	78,1
LENGTH_L	44
Outer Diameter_do	220
Z Measurement k	180
z1	24

Product code

Item no EAN	4021598106673
Item no GF	35001029130
Item no GTIN	04021598106673
Item no LVI	1720834
Item no NRF	5071246
Item no RSK	1899499
Item no VVS	045458100

Dimensions

Item Unit Height	50
Item Unit Length	220
Item Unit Weight	5,23
Item Unit Width	220
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905481446
Packaging GTIN PL4	06414905481453
Packaging Height PL1	60
Packaging Height PL4	488
Packaging Length PL1	350

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	90
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,004935
Packaging Volume PL4	0,46848
Packaging Weight PL1	5,33
Packaging Weight PL4	479,7
Packaging Width PL1	235
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+