
Product data sheet




GF Uponor RS adapter male thread R2 1/2"MT-RS2

1029132

- Made of tin plated brass
- Connects RS base parts RS2 or RS3 depending on connection thread size.

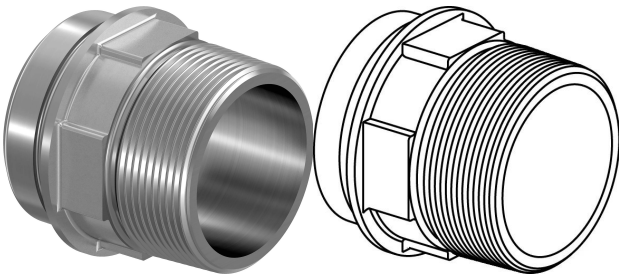



About GF Uponor RS adapter male thread

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS adapter male thread R2 1/2"MT-RS2

1029132

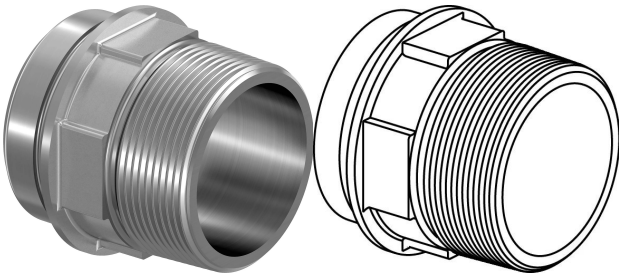



Product code

Item no EAN	4021598106697
Item no GF	35001029132
Item no GTIN	04021598106697
Item no LVI	1720827
Item no NRF	5071238
Item no RSK	1899492
Item no VVS	045451167

Dimensions

Item Unit Height	65
Item Unit Length	74
Item Unit Weight	0,55
Item Unit Width	74
Item_UOM	pce

Measurements

LENGTH_L	62,8
Length (l1)	20
Length (l2)	27,1
Male_thread_R	2 1/2
z1	15,7

Packaging

Packaging GTIN PL1	06414905439416
Packaging GTIN PL4	06414905491322
Packaging Height PL1	85
Packaging Height PL4	680
Packaging Length PL1	117

Packaging Length PL4	1200
Packaging Material (number) PL1	21
Packaging Material PL1	non-corrugated cardboard / cartone non corrugato
Packaging Material (short) PL1	PAP_OTHER
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0009945
Packaging Volume PL4	0,6527999999999999
Packaging Weight PL1	0,610
Packaging Weight PL4	317,8
Packaging Width PL1	100
Packaging Width PL4	800

Technical data

Recycling Text Block PL1	non-corrugated cardboard / cartone non corrugato

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+