


Uponor RS adapter male thread R3"MT-RS3

1029133

- Made of tin-plated brass
- Fits to all RS2 or RS3 base parts

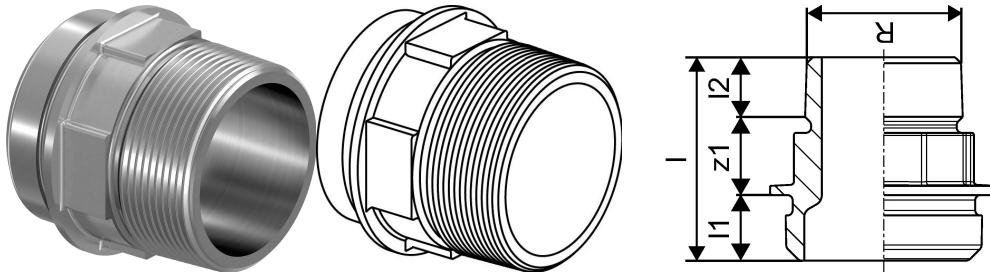

About Uponor RS adapter male thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor RS adapter male thread R3"MT-RS3

1029133

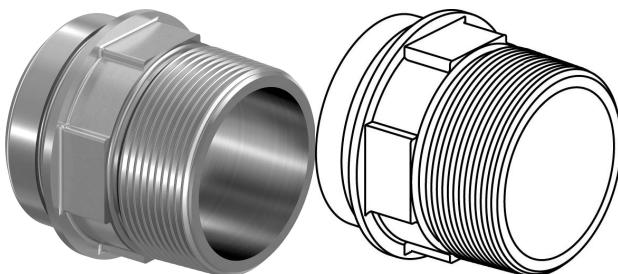

Product code

| | |
|--------------|----------------|
| Item no EAN | 4021598106703 |
| Item no GF | 35001029133 |
| Item no GTIN | 04021598106703 |
| Item no LVI | 1720828 |
| Item no NRF | 5071239 |
| Item no RSK | 1899493 |
| Item no VVS | 045451114 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 74 |
| Item Unit Length | 90 |
| Item Unit Weight | 0,826 |
| Item Unit Width | 90 |
| Item_UOM | pce |

Measurements

| | |
|---------------|------|
| LENGTH_L | 72,6 |
| Length (l1) | 20 |
| Length (l2) | 29,8 |
| Male_thread_R | 3 |
| z1 | 22,8 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905523320 |
| Packaging GTIN PL4 | 06414905523337 |
| Packaging Height PL1 | 115 |
| Packaging Height PL4 | 715 |
| Packaging Length PL1 | 115 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |

| | |
|------------------------|------------|
| Packaging Quantity PL4 | 240 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,00171925 |
| Packaging Volume PL4 | 0,6864 |
| Packaging Weight PL1 | 0,926 |
| Packaging Weight PL4 | 222,12 |
| Packaging Width PL1 | 130 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb