


Uponor RS adapter female thread Rp2"FT-RS2

1029135

- Made of tin plated brass
- Connects RS base parts RS2 or RS3 depending on connection thread size.

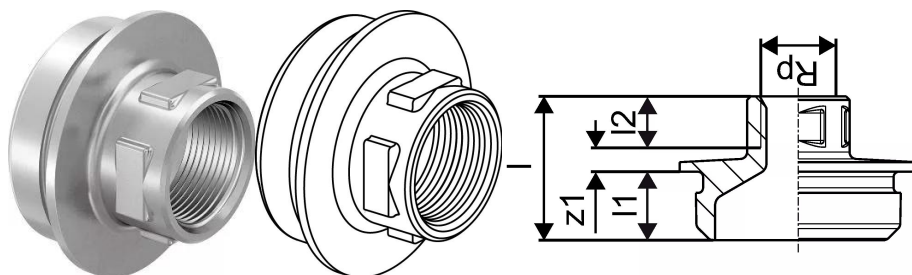

About Uponor RS adapter female thread

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification

- UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor RS adapter female thread Rp2"FT-RS2

1029135



Measurements

Female thread Rp	2
LENGTH_L	54
Length (l1)	20
Length (l2)	25,7
z1	8,3

Product code

Item no EAN	4021598106727
Item no GF	35001029135
Item no GTIN	04021598106727
Item no LVI	1720830
Item no NRF	5071242
Item no RSK	1899495
Item no VVS	045452112

Dimensions

Item Unit Height	57
Item Unit Length	67
Item Unit Weight	0,473
Item Unit Width	67
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905263837
Packaging GTIN PL4	06414905263844
Packaging Height PL1	80
Packaging Height PL4	680
Packaging Length PL1	115
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0009016
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,528
Packaging Weight PL4	253,25
Packaging Width PL1	98
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb