
Product data sheet



GF Uponor RS adapter female thread Rp2 1/2"FT-RS2

1029136

- Made of tin plated brass
- Connects RS base parts RS2 or RS3 depending on connection thread size.

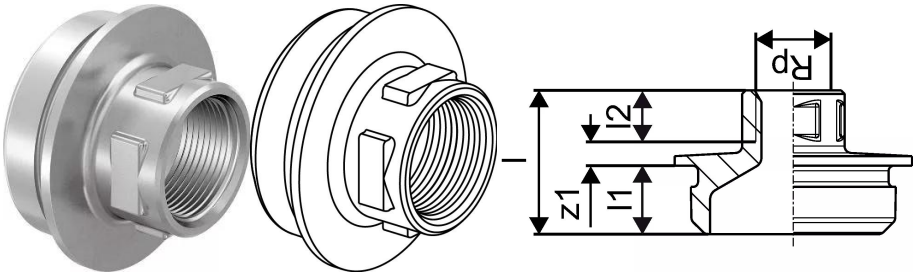

About GF Uponor RS adapter female thread

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS adapter female thread Rp2 1/2"FT-RS2

1029136

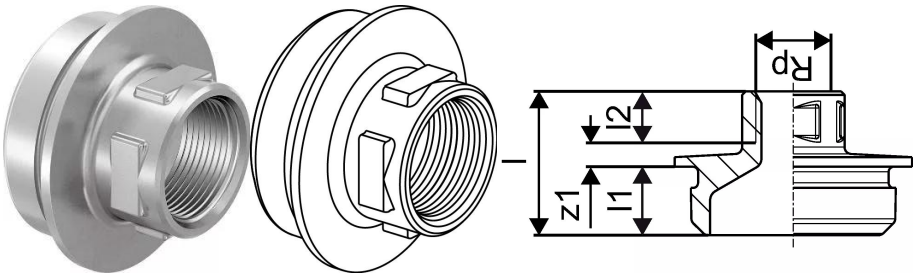

Measurements

Female thread Rp	2,5
LENGTH_L	62,5
Length (l1)	20
Length (l2)	30,2
z1	12,3

Product code

Item no EAN	4021598106734
Item no GF	35001029136
Item no GTIN	04021598106734
Item no LVI	1720831
Item no NRF	5071243
Item no RSK	1899496
Item no VVS	045452167

Dimensions

Item Unit Height	74
Item Unit Length	80
Item Unit Weight	0,569
Item Unit Width	80
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905439430
Packaging GTIN PL4	06414905491346
Packaging Height PL1	82
Packaging Height PL4	680
Packaging Length PL1	100

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000984
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,624
Packaging Weight PL4	299,67
Packaging Width PL1	120
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+