


## Uponor RS adapter female thread Rp2 1/2"FT-RS2

### 1029136

- Made of tin-plated brass.
- its to all RS2 or RS3 base parts

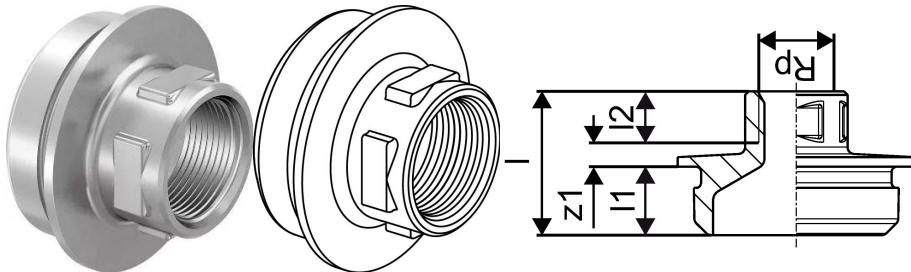

## About Uponor RS adapter female thread

### Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

### Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

### Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

## Uponor RS adapter female thread Rp2 1/2"FT-RS2

1029136

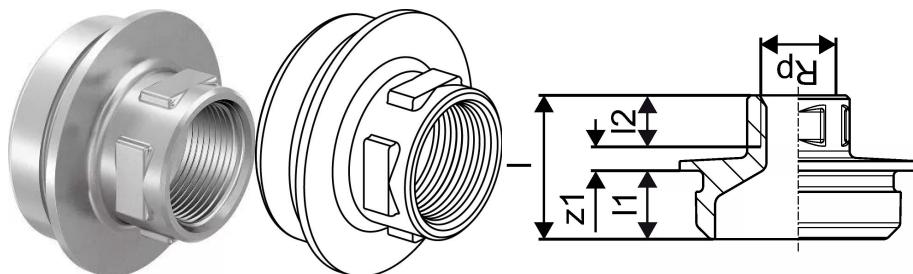

### Measurements

Female thread Rp	2,5
LENGTH_L	62,5
Length (l1)	20
Length (l2)	30,2
z1	12,3

### Product code

Item no EAN	4021598106734
Item no GF	35001029136
Item no GTIN	04021598106734
Item no LVI	1720831
Item no NRF	5071243
Item no RSK	1899496
Item no VVS	045452167

### Dimensions

Item Unit Height	74
Item Unit Length	80
Item Unit Weight	0,569
Item Unit Width	80
Item_UOM	pce

### Packaging

Packaging GTIN PL1	06414905439430
Packaging GTIN PL4	06414905491346
Packaging Height PL1	82
Packaging Height PL4	680
Packaging Length PL1	100
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	480
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,000984
Packaging Volume PL4	0,6528
Packaging Weight PL1	0,624
Packaging Weight PL4	299,67
Packaging Width PL1	120
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)