


Uponor RS adapter female thread Rp3"FT-RS3

1029137

- Made of tin-plated brass.
- fits to all RS2 or RS3 base parts

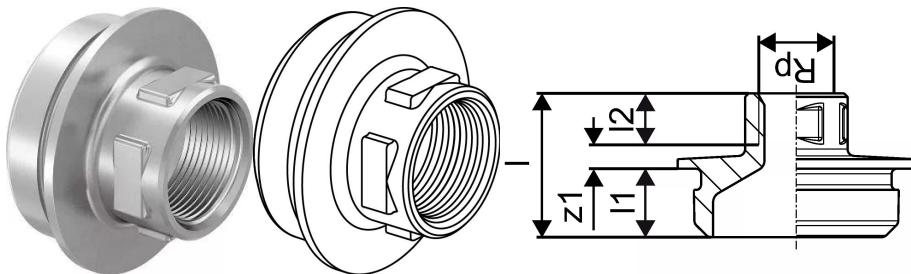

About Uponor RS adapter female thread

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

- Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

- Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

- Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

- Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

- Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

- WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

- WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


- WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

- KIWA – UK water Regulation 4

- Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor RS adapter female thread Rp3"FT-RS3

1029137

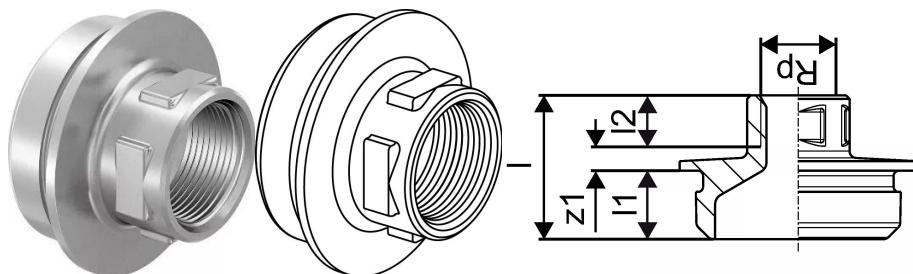

Measurements

Female thread Rp	3
LENGTH_L	65,3
Length (l1)	20
Length (l2)	33,3
z1	12

Product code

Item no EAN	4021598106741
Item no GF	35001029137
Item no GTIN	04021598106741
Item no LVI	1720832
Item no NRF	5071244
Item no RSK	1899497
Item no VVS	045452114

Dimensions

Item Unit Height	93
Item Unit Length	65
Item Unit Weight	0,751
Item Unit Width	93
Item_UOM	pce

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

Packaging

Packaging GTIN PL1	06414905523375
Packaging GTIN PL4	06414905523382
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	134

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0023115
Packaging Volume PL4	0,6864
Packaging Weight PL1	0,867
Packaging Weight PL4	209
Packaging Width PL1	150
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb