


## Uponor RS adapter female thread Rp3"FT-RS3

1029137

- Made of tin plated brass
- Connects RS base parts RS2 or RS3 depending on connection thread size.

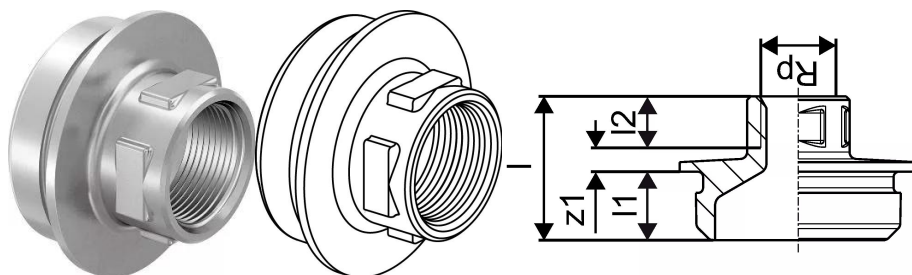

### About Uponor RS adapter female thread

#### Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification

- UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor RS adapter female thread Rp3"FT-RS3

1029137



### Measurements

Female thread Rp	3
LENGTH_L	65,3
Length (l1)	20
Length (l2)	33,3
z1	12

### Product code

Item no EAN	4021598106741
Item no GF	35001029137
Item no GTIN	04021598106741
Item no LVI	1720832
Item no NRF	5071244
Item no RSK	1899497
Item no VVS	045452114

### Dimensions

Item Unit Height	93
Item Unit Length	65
Item Unit Weight	0,751
Item Unit Width	93
Item_UOM	pce

### Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks
-----------------------------	--

### Packaging

Packaging GTIN PL1	06414905523375
Packaging GTIN PL4	06414905523382
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	134

Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	240
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0023115
Packaging Volume PL4	0,6864
Packaging Weight PL1	0,867
Packaging Weight PL4	209
Packaging Width PL1	150
Packaging Width PL4	800

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)