
Product data sheet




GF Uponor RS tee RS3-RS3-RS3

1029143

- Made of tin-plated brass
- Base part for RS2 or RS3 adapters or fittings - includes 2 lock pins.

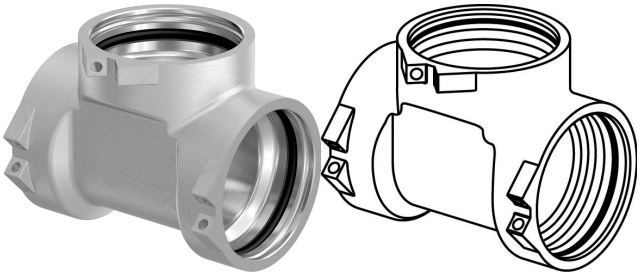

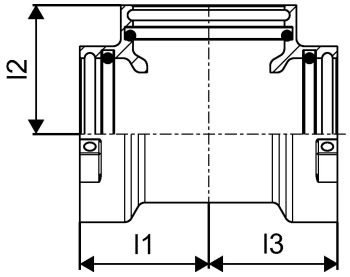

About GF Uponor RS tee

Specification

- Tin-plated brass
- Fixed press sleeve with inspection windows
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification


UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor RS tee RS3-RS3-RS3

1029143

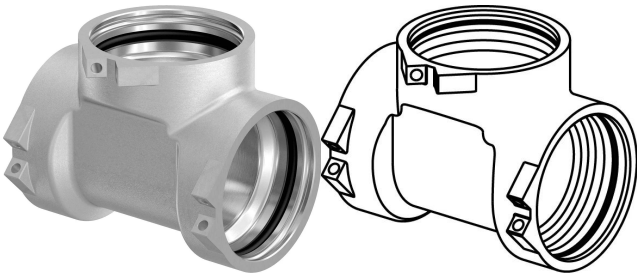

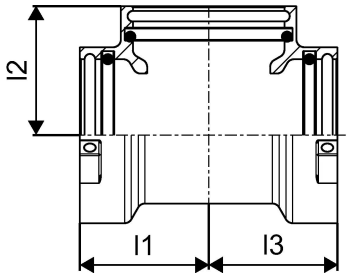

Product code

Item no EAN	4021598106802
Item no GF	35001029143
Item no GTIN	04021598106802
Item no LVI	1720816
Item no NRF	5071226
Item no RSK	1808050
Item no VVS	045455114

Dimensions

Item Unit Height	108
Item Unit Length	140
Item Unit Weight	1,0
Item Unit Width	123
Item_UOM	pce

Measurements

Length (l1)	68
Length (l2)	68
Length (l3)	68

Packaging

Packaging GTIN PL1	06414905439508
Packaging GTIN PL4	06414905491414
Packaging Height PL1	115
Packaging Height PL4	715
Packaging Length PL1	160
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	175
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,002944
Packaging Volume PL4	0,6864
Packaging Weight PL1	1,4
Packaging Weight PL4	245
Packaging Width PL1	160
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+