


Uponor RS coupling RS3-RS3

1029145

- Made of tin-plated brass
- Base part for all RS2 or RS3 inserts including 2 lock pins.

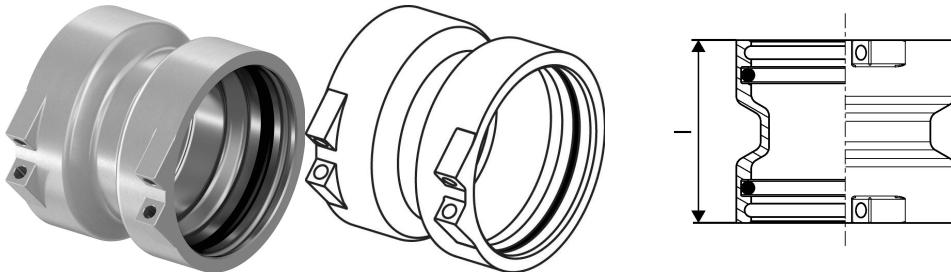

About Uponor RS coupling

Specification

- with fixed press sleeve
- stop ring
- colour code
- Test safety

Application

-Heating systems (high temperature radiators) - where the water temperature does not continuously exceed 80°C, 10 bar (Conditions to application Class 5 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 100°C for an accumulative 100 hours over the working life of the system. (Heating systems must be installed with room and water temperature controls in accordance with the current Building Regulations Parts L1 (Energy – Dwellings) and L2 (Energy – Non Dwellings) for England and Wales, or an equivalent national standard for Scotland or Republic of Ireland)

-Cold water domestic services: 0°C to 20°C where the water temperature does not exceed 20°C, 16bar

-Hot water domestic services: 20°C to 70°C where the water temperature does not continuously exceed 70°C, 10 bar (Conditions to application Class 2 - BS EN ISO 21003-1:2008). The maximum short-term malfunction temperature is 95°C for an accumulative 100 hours over the working life of the system.

-Uponor multi-layer pipe can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under 'Domestic Services'

-Chilled water: -10°C to 10°C, 10 bar. If risk of damage from freezing, a suitable anti-freeze additive must be used. Any additive must be suitable for use with Polyethylene, PPSU, EPDM and CW625N brass if not different mentioned:

- Male and female threads acc.to EN 10226-1.

Certification

-WRAS : 1903901 - Uponor S-Press PLUS, S-Press PLUS, PPSU, MLC and SAC 16-32mm

-WRAS : 2010907 - Uponor S-Press 12 & 14mm, MLC


-WRAS : 2109108 - S-Press & RS Modular 40-110mm, MLC

-KIWA – UK water Regulation 4

-Manufacturing is in accordance with the international quality standard ISO 9001 and environmental standard ISO 14001.

Uponor RS coupling RS3-RS3

1029145

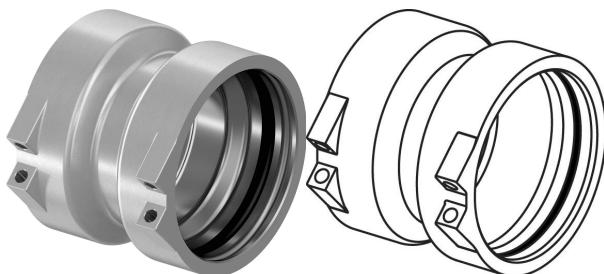

Product code

Item no EAN	4021598106826
-------------	---------------

Item no GF	35001029145
------------	-------------

Item no GTIN	04021598106826
--------------	----------------

Item no LVI	1720810
-------------	---------

Item no NRF	5071219
-------------	---------

Item no RSK	1899481
-------------	---------

Item no VVS	045456114
-------------	-----------

Dimensions

Item Unit Height	63
------------------	----

Item Unit Length	101
------------------	-----

Item Unit Weight	0,73
------------------	------

Item Unit Width	101
-----------------	-----

Item_UOM	pce
----------	-----

Measurements

LENGTH_L	58
----------	----

Packaging

Packaging GTIN PL1	06414905439515
--------------------	----------------

Packaging GTIN PL4	06414905491421
--------------------	----------------

Packaging Height PL1	70
----------------------	----

Packaging Height PL4	600
----------------------	-----

Packaging Length PL1	150
----------------------	-----

Packaging Length PL4	1200
----------------------	------

Packaging Quantity PL1	1
------------------------	---

Packaging Quantity PL4	480
------------------------	-----

Packaging Type PL1	Base_Box
--------------------	----------

Packaging Type PL4	Pallet
--------------------	--------

Packaging Volume PL1	0,001365
----------------------	----------

Packaging Volume PL4	0,576
Packaging Weight PL1	0,8
Packaging Weight PL4	378,904
Packaging Width PL1	130
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb