


Uponor S-Press elbow PPSU 75-75

1032878

- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

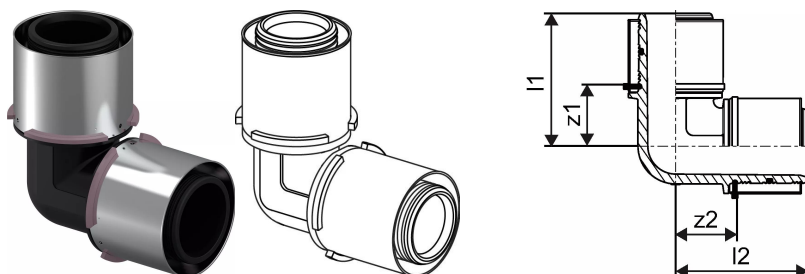

About Uponor S-Press elbow PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press elbow PPSU 75-75

1032878

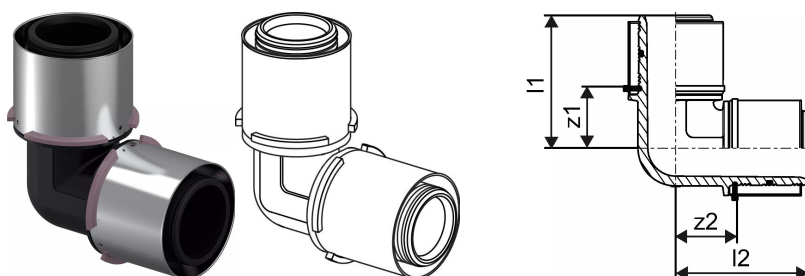

Product code

| | |
|--------------|----------------|
| Item no EAN | 6414905220779 |
| Item no GF | 35001032878 |
| Item no GTIN | 06414905220779 |
| Item no LVI | 1720115 |
| Item no NOBB | 54938955 |
| Item no NRF | 5114359 |
| Item no RSK | 1896574 |
| Item no VVS | 087430175 |

Dimensions

| | |
|------------------|-------|
| Item Unit Height | 84 |
| Item Unit Length | 151 |
| Item Unit Weight | 0,625 |
| Item Unit Width | 151 |
| Item_UOM | pce |

Measurements

| | |
|-------------|-------|
| Length (l1) | 107,5 |
| Length (l2) | 107,5 |
| z1 | 46,6 |
| z2 | 46,6 |

Packaging

| | |
|------------------------|----------------|
| Packaging GTIN PL1 | 06414905281084 |
| Packaging GTIN PL4 | 06414905281091 |
| Packaging Height PL1 | 105 |
| Packaging Height PL4 | 756 |
| Packaging Length PL1 | 160 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 1 |

| | |
|------------------------|----------|
| Packaging Quantity PL4 | 210 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,002688 |
| Packaging Volume PL4 | 0,72576 |
| Packaging Weight PL1 | 0,725 |
| Packaging Weight PL4 | 177,25 |
| Packaging Width PL1 | 160 |
| Packaging Width PL4 | 800 |

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb