


## Uponor S-Press elbow 45° PPSU 63-63

### 1032879

- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

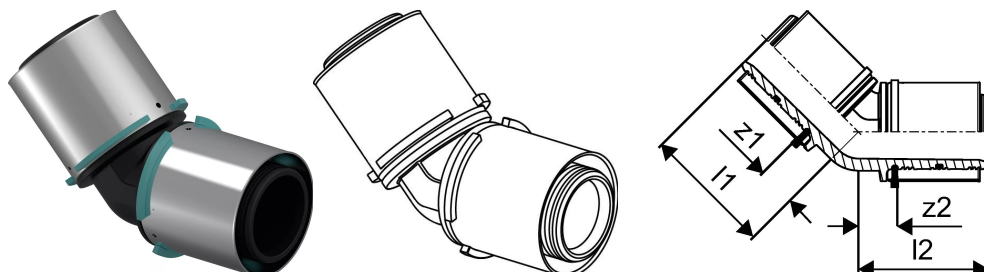

## About Uponor S-Press elbow 45° PPSU

### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

### Certification

UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press elbow 45° PPSU 63-63

1032879



### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905220786  |
| Item no GF   | 35001032879    |
| Item no GTIN | 06414905220786 |
| Item no LVI  | 1720116        |
| Item no NOBB | 54938966       |
| Item no NRF  | 5114361        |
| Item no RSK  | 1896575        |
| Item no VVS  | 087433163      |

### Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 72    |
| Item Unit Length | 164   |
| Item Unit Weight | 0,385 |
| Item Unit Width  | 117   |
| Item_UOM         | pce   |

### Measurements

|             |      |
|-------------|------|
| Length (l1) | 83,4 |
| Length (l2) | 83,4 |
| z1          | 22,5 |
| z2          | 22,5 |

### Packaging

|                        |                |
|------------------------|----------------|
| Packaging GTIN PL1     | 06414905281039 |
| Packaging GTIN PL4     | 06414905281046 |
| Packaging Height PL1   | 105            |
| Packaging Height PL4   | 756            |
| Packaging Length PL1   | 182            |
| Packaging Length PL4   | 1200           |
| Packaging Quantity PL1 | 1              |

|                        |            |
|------------------------|------------|
| Packaging Quantity PL4 | 192        |
| Packaging Type PL1     | Base_Box   |
| Packaging Type PL4     | Pallet     |
| Packaging Volume PL1   | 0,00368823 |
| Packaging Volume PL4   | 0,72576    |
| Packaging Weight PL1   | 0,485      |
| Packaging Weight PL4   | 118,12     |
| Packaging Width PL1    | 193        |
| Packaging Width PL4    | 800        |

## Technical documents

Download documents here 

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)