


Uponor S-Press elbow 45° PPSU 75-75

1032880

- Fast installation with easy bevel and without calibration
- Inspection windows on press sleeve
- Colour code

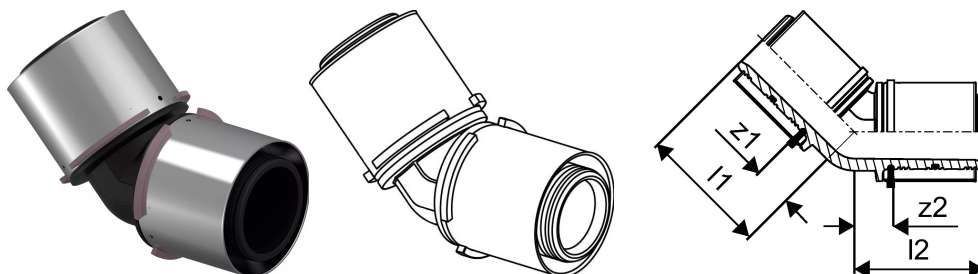

About Uponor S-Press elbow 45° PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

Uponor S-Press elbow 45° PPSU 75-75

1032880

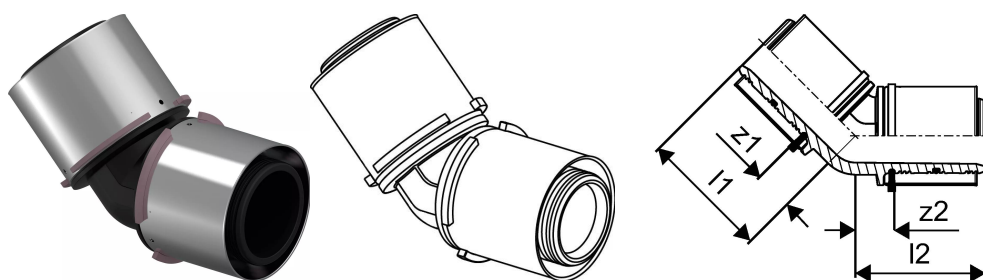

Product code

Item no EAN	6414905220793
Item no GF	35001032880
Item no GTIN	06414905220793
Item no LVI	1720117
Item no NOBB	54938974
Item no NRF	5114362
Item no RSK	1896576
Item no VVS	087433175

Dimensions

Item Unit Height	84
Item Unit Length	173
Item Unit Weight	0,547
Item Unit Width	130
Item_UOM	pce

Measurements

Length (l1)	86,3
Length (l2)	86,3
z1	25,4
Z2	25,4

Packaging

Packaging GTIN PL1	06414905281053
Packaging GTIN PL4	06414905281077
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	182
Packaging Length PL4	1200
Packaging Quantity PL1	1

Packaging Quantity PL4	192
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,00368823
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,647
Packaging Weight PL4	149,224
Packaging Width PL1	193
Packaging Width PL4	800

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb