


## Uponor S-Press composite elbow 45deg PPSU 75-75

1032880

- Fast installation with easy bevel and without calibration
- Colour code

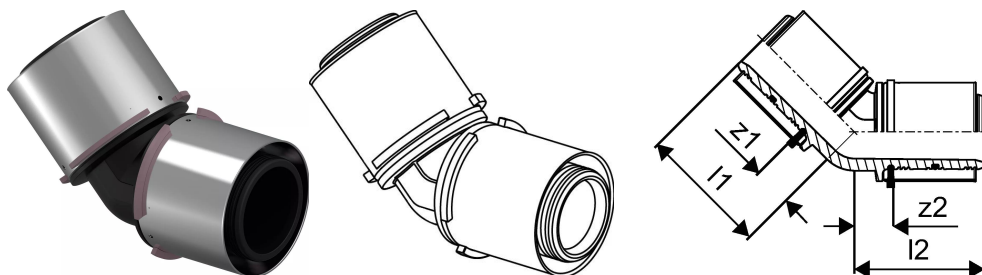

### About Uponor S-Press composite elbow 45deg PPSU

#### Specification

- with fixed press sleeve
- stop ring
- test safety

#### Application

- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

- if not different mentioned:


Male and female threads acc.to EN 10226-1.

#### Certification

- Approvals by local OM.  
E.g.
  - DVGW
  - AENOR

## Uponor S-Press composite elbow 45deg PPSU 75-75

1032880

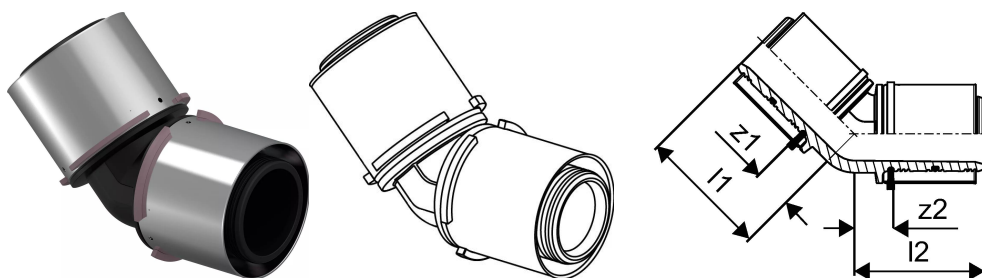

### Technical data

Item no VVS	087433175
Item no NRF	5114362
Item (unit of measurement)	pce
Length (l1)	86 mm
Length (l2)	86 mm
z2	25 mm
Packaging Quantity PL1	1
Packaging Quantity PL4	192

### Technical documents

[Download documents here](#)

#### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)