
Product data sheet



GF Uponor S-Press tee reduced PPSU 75-40-75

1032893

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

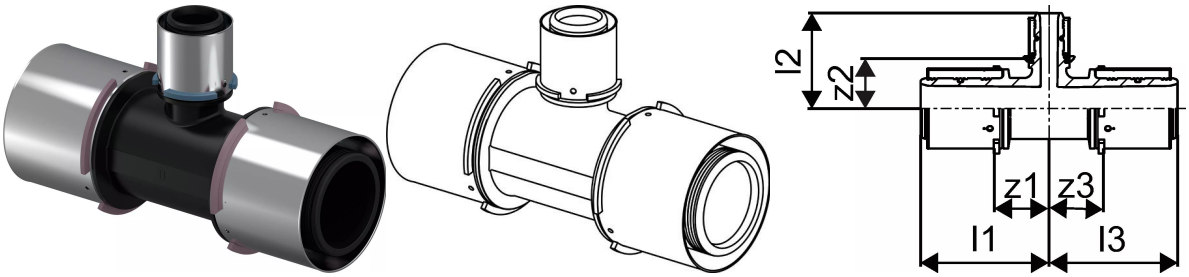

About GF Uponor S-Press tee reduced PPSU

Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


Certification

UK Reg4 approval
- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

GF Uponor S-Press tee reduced PPSU 75-40-75

1032893

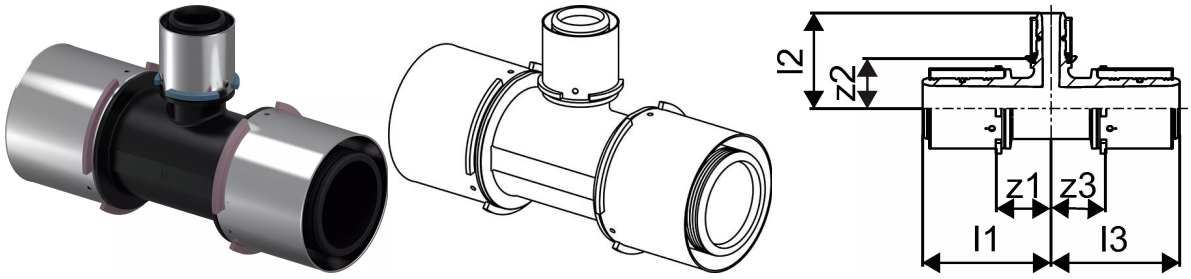

Product code

Item no EAN	6414905220922
Item no GF	35001032893
Item no GTIN	06414905220922
Item no LVI	1720162
Item no NOBB	54939106
Item no NRF	5114376
Item no RSK	1808047
Item no VVS	087442171

Dimensions

Item Unit Height	84
Item Unit Length	215
Item Unit Weight	0,733
Item Unit Width	129
Item_UOM	pce

Measurements

Length (l1)	107,5
Length (l2)	85,6
Length (l3)	107,5
z1	46,6
Z2	44,3
Z3	46,6

Status

MTO (longer delivery times)	Item available on request, minimum lead time 2 weeks

Packaging

Packaging GTIN PL1	06414905281398

Packaging GTIN PL4	06414905281404
Packaging Height PL1	105
Packaging Height PL4	756
Packaging Length PL1	224
Packaging Length PL4	1200
Packaging Quantity PL1	1
Packaging Quantity PL4	150
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,0037632
Packaging Volume PL4	0,72576
Packaging Weight PL1	0,853
Packaging Weight PL4	152,95
Packaging Width PL1	160
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+