


## Uponor S-Press tee reducer PPSU 75-50-75

**1032894**

- Fast installation with easy bevel and without need for calibration
- Inspection windows on press sleeve
- Colour code

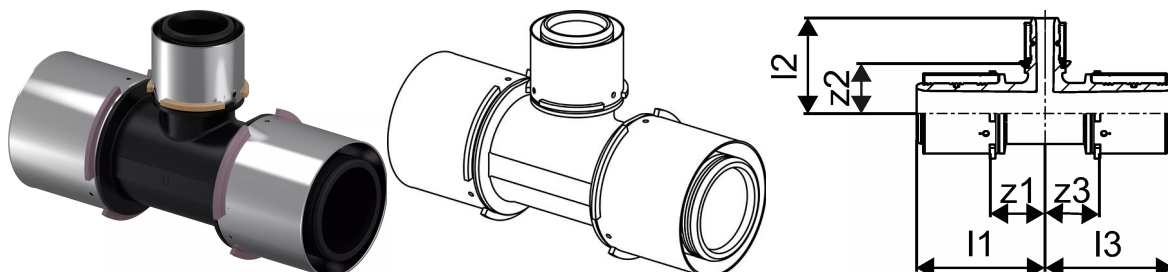

### About Uponor S-Press tee reducer PPSU

#### Specification

- Tin-plated brass or PPSU
- With fixed press sleeve
- Stop ring
- Colour code
- Test safety
- Male and female threads to BS EN 10226-1

#### Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.

#### Certification


UK Reg4 approval

- WRAS or
- KIWA

To meet the requirements of the Water Supply (Water Fittings) Regulations 1999

## Uponor S-Press tee reducer PPSU 75-50-75

1032894

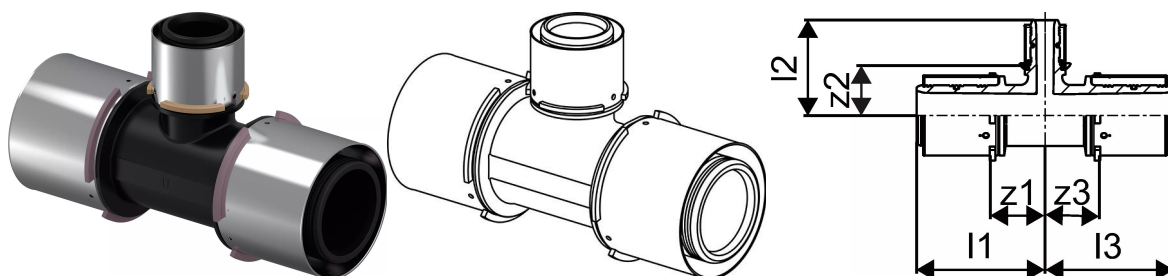

### Product code

|              |                |
|--------------|----------------|
| Item no EAN  | 6414905220939  |
| Item no GF   | 35001032894    |
| Item no GTIN | 06414905220939 |
| Item no LVI  | 1720165        |
| Item no NOBB | 54939114       |
| Item no NRF  | 5114377        |
| Item no RSK  | 1808048        |
| Item no VVS  | 087442172      |

### Dimensions

|                  |       |
|------------------|-------|
| Item Unit Height | 84    |
| Item Unit Length | 215   |
| Item Unit Weight | 0,752 |
| Item Unit Width  | 129   |
| Item_UOM         | pce   |

### Measurements

|             |       |
|-------------|-------|
| Length (I1) | 107,5 |
| Length (I2) | 85,6  |
| Length (I3) | 107,5 |
| z1          | 46,6  |
| Z2          | 48,6  |
| Z3          | 46,6  |

### Status

MTO (longer delivery times) Item available on request, minimum lead time 2 weeks

### Packaging

|                      |                |
|----------------------|----------------|
| Packaging GTIN PL1   | 06414905281411 |
| Packaging GTIN PL4   | 06414905281428 |
| Packaging Height PL1 | 105            |

|                        |           |
|------------------------|-----------|
| Packaging Height PL4   | 756       |
| Packaging Length PL1   | 224       |
| Packaging Length PL4   | 1200      |
| Packaging Quantity PL1 | 1         |
| Packaging Quantity PL4 | 150       |
| Packaging Type PL1     | Base_Box  |
| Packaging Type PL4     | Pallet    |
| Packaging Volume PL1   | 0,0037632 |
| Packaging Volume PL4   | 0,72576   |
| Packaging Weight PL1   | 0,872     |
| Packaging Weight PL4   | 155,8     |
| Packaging Width PL1    | 160       |
| Packaging Width PL4    | 800       |

## Technical documents

[Download documents here](#)

### Uponor UK

Blackmor Lane The Pavilion  
WD18 8GA, Watford  
UK

T +44 (0)1923 927000  
E [enquiries.uk@uponor.com](mailto:enquiries.uk@uponor.com)

[www.uponor.com/en-gb](http://www.uponor.com/en-gb)