Product data sheet



GF Uponor Aqua Pipe natural Aenor PN6, S 50x4,6 5m

1033485

- Operating pressure 6 bar
- Bar

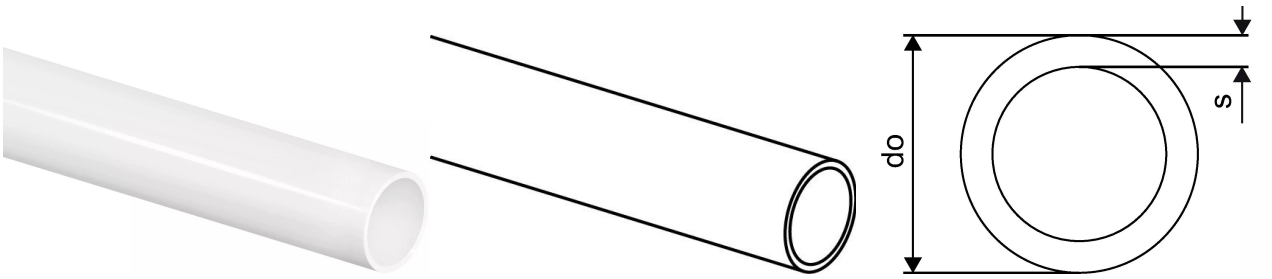

About GF Uponor Aqua Pipe natural Aenor PN6, S

Specification

- Pipes manufactured from cross-linked polyethylene -
PE-Xa acc. BS EN ISO 15875
- Application class 1 & 2 - Hot water supply
- Fire class E according to BS EN 13501-1.
- Conduits manufactured from high density polyethylene

Application

- Hot water services - where the water temperature does not continuously exceed 70ºC, maximum design pressure of 6 bar (conditions to class 2 - BS EN ISO 15875-1:2003). The maximum short-term malfunction temperature is 95ºC for an accumulative 100 hours over the working life of the system.

- Cold water services <20 ºC - where the maximum system pressure does not exceed the maximum operating pressure of 10 bar.

- Uponor Q&E Shrink-fit system can be used for DHW recirculating systems, provided the operating temperatures and pressures do not exceed the maximum conditions detailed under ‘Hot water services’

GF Uponor Aqua Pipe natural Aenor PN6, S 50x4,6 5m

1033485

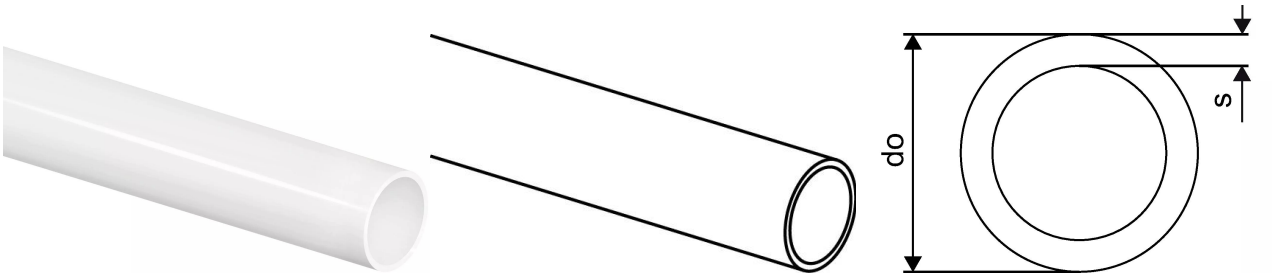

Product code

Item no EAN	7321500046156
Item no GTIN	07321500046156

Dimensions

Item Unit Height	50
Item Unit Length	1000
Item Unit Weight	0,654
Item Unit Width	50
Item_UOM	m

Measurements

Outer Diameter_do	50
Wall thickness_s	4,6

Packaging

Packaging GTIN PL2	06414905265756
Packaging GTIN PL4	06414905265763
Packaging Height PL2	50
Packaging Height PL4	2500
Packaging Length PL2	5000
Packaging Length PL4	3100
Packaging Quantity PL2	10
Packaging Quantity PL4	550
Packaging Type PL2	Bag
Packaging Type PL4	Wooden_Cage
Packaging Volume PL2	0,025
Packaging Volume PL4	19,375
Packaging Weight PL2	6,59

Packaging Weight PL4	387,45
Packaging Width PL2	100
Packaging Width PL4	2500

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+