


Uponor Siccus 12 panel, feeder 12mm 1200x250x15mm c/c40mm PS

1034340

- installation panel with grooves
- for feeders of radiant loops
- EPS Compressive strength: = 150 kPa
- $R=0.4 \text{ m}^2\text{K/W}$



About Uponor Siccus 12 panel, feeder

Specification

- Siccus underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium heat spreaders.
- EN 13501-1 fire classification: class E
- for installations with pipe c-c 125mm
- for pipe dim 12mm


Application

- radiant underfloor heating and cooling
- for dry-build installations
- very low construction height

Certification

- DIN CERTCO: 7F316-F

Uponor Siccus 12 panel, feeder 12mm 1200x250x15mm c/c40mm PS 1034340

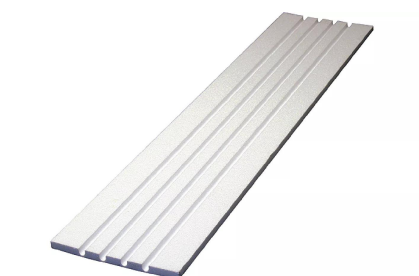

Technical documents

Download documents here 

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb