
Product data sheet




GF Uponor Siccus panel EPS 20 790x1200x30

1034347

- UFH installation panels with grooves
- EPS Compressive strength: = 200 kPa

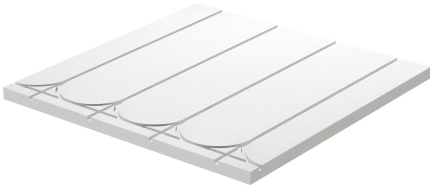



About GF Uponor Siccus panel EPS 20

Specification

- Siccus underfloor heating panel system, consists of EPS (HBCD-free) boards acc. EN 13163 with Aluminium heat spreaders.
- Fire class E to BS EN 13501-1
- For installations with pipe c-c 300mm
- For pipe dim 20mm


Application

- Radiant underfloor heating and cooling
- For dry-build installations

GF Uponor Siccus panel EPS 20 790x1200x30

1034347





Measurements

Distance center center	300
LENGTH_L	1200
Z Measurement b	790
Z Measurement h	30

Product code

Item no EAN	7321500030971
Item no GTIN	07321500030971
Item no LVI	2023430
Item no NOBB	41946380
Item no NRF	8362052
Item no RSK	2419500
Item no VVS	339261028

Dimensions

Item Unit Height	30
Item Unit Length	790
Item Unit Weight	0,83
Item Unit Width	1200
Item_UOM	pce

Packaging

Packaging GTIN PL1	06414905457601
Packaging GTIN PL4	06414905491827
Packaging Height PL1	160
Packaging Height PL4	945
Packaging Length PL1	1200
Packaging Length PL4	1200

Packaging Quantity PL1	5
Packaging Quantity PL4	25
Packaging Type PL1	Base_Box
Packaging Type PL4	Pallet
Packaging Volume PL1	0,1536
Packaging Volume PL4	0,9072
Packaging Weight PL1	4,51
Packaging Weight PL4	44,1
Packaging Width PL1	800
Packaging Width PL4	800

Technical documents

Download documents here

Excellence in Flow

Visit our webpage to get in contact with your local specialist:
www.georgfischer.com/locations



Uponor UK

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb

+GF+