# Product data sheet





# GF Uponor S-Press PLUS coupling PPSU 32-32

## 1039936

- Material: PPSU



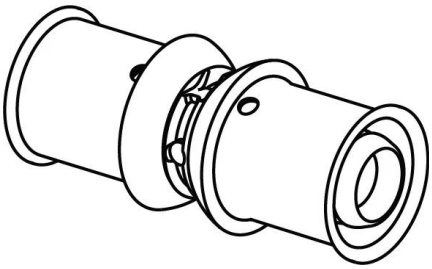

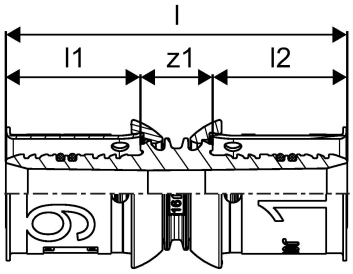

# About GF Uponor S-Press PLUS coupling PPSU

## Specification

- Unique press indicator foil
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour coded
- Fixed press sleeve with inspection windows
- Precise jaw location
- Fast diameter recognition
- Accurate test safety function
- 100% backward compatible with existing Uponor components
- Flow rate optimized fitting body

## Application

Tested/approved according to BS EN ISO 21003 Multilayer piping systems for hot and cold water installations inside buildings for application class 1,2,4,5/10bar

Domestic water services: The permanent operating temperature from 20°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.

Domestic cold water services : where the water temperature does not exceed 20°C at a maximum permanent operating pressure of 16bar.

Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.


## Certification


UK Reg4 approval
- WRAS or
- KIWA
to meet the requirements of the Water Supply (Water Fittings) Regulations 1999

# GF Uponor S-Press PLUS coupling PPSU 32-32

## 1039936



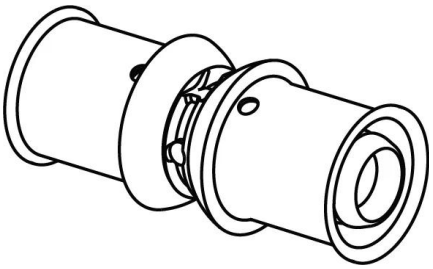

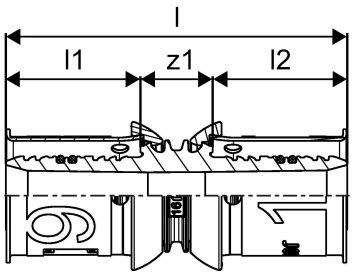


### Product code

| | |
|---|---|
| Item no EAN | 6414905228751 |
| Item no GF | 35001039936 |
| Item no GTIN | 06414905228751 |
| Item no LVI | 1720693 |
| Item no NOBB | 55171525 |
| Item no NRF | 5114388 |
| Item no RSK | 1899402 |
| Item no VVS | 087452132 |

### Dimensions

| | |
|---|---|
| Item Unit Height | 39.3 |
| Item Unit Length | 69 |
| Item Unit Weight | 0,06689 |
| Item Unit Width | 39.3 |
| Item_UOM | pce |

### Measurements

| | |
|---|---|
| LENGTH_L | 69 |
| Length (l1) | 27,8 |
| Length (l2) | 27,8 |
| z1 | 13,4 |

### Packaging

| | |
|---|---|
| Packaging GTIN PL1 | 06414905635139 |
| Packaging GTIN PL3 | 06414905635146 |
| Packaging GTIN PL4 | 06414905288533 |
| Packaging Height PL1 | 89 |
| Packaging Height PL3 | 189 |

| | |
|---|---|
| Packaging Height PL4 | 711 |
| Packaging Length PL1 | 176 |
| Packaging Length PL3 | 357 |
| Packaging Length PL4 | 1200 |
| Packaging Quantity PL1 | 10 |
| Packaging Quantity PL3 | 80 |
| Packaging Quantity PL4 | 1920 |
| Packaging Type PL1 | Base_Box |
| Packaging Type PL3 | Box |
| Packaging Type PL4 | Pallet |
| Packaging Volume PL1 | 0,00211464 |
| Packaging Volume PL3 | 0,018555075 |
| Packaging Volume PL4 | 0,68256 |
| Packaging Weight PL1 | 0,744 |
| Packaging Weight PL3 | 6,474 |
| Packaging Weight PL4 | 180,367 |
| Packaging Width PL1 | 135 |
| Packaging Width PL3 | 275 |
| Packaging Width PL4 | 800 |

## Technical documents

Download documents here

# Excellence in Flow

Visit our webpage to get in contact with your local specialist:
**www.georgfischer.com/locations**




**Uponor UK**

Blackmor Lane The Pavillion
WD18 8GA, Watford
UK

T +44 (0)1923 381212
E customerservice.uk.bfs@georgfischer.com

www.uponor.com/en-gb


+GF+