


Uponor S-Press PLUS tee equal PPSU 20-20-20

1039945

- Fixed stainless steel sleeve
- Unique press indicator
- Fast 3-step installation (press without bevel)
- Innovative QR code for immediate digital access
- Colour code

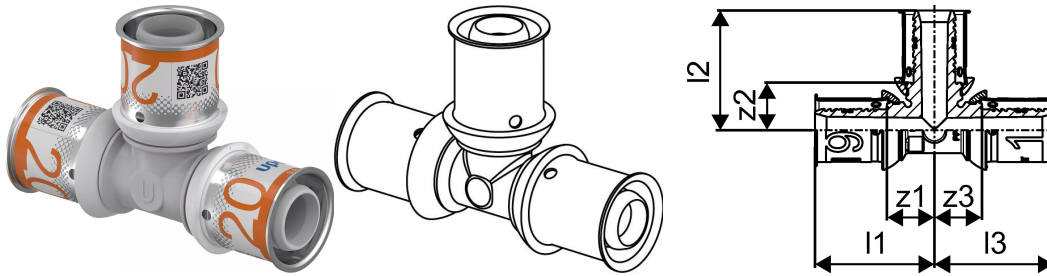

About Uponor S-Press PLUS tee equal PPSU

Application


- Tap water: The permanent operating temperature ranges from 0°C to 70°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 95°C for a period of 100 hours in the operating life time.
- Heating: The permanent operating temperature ranges up to 80°C at a maximum permanent operating pressure of 10 bar. The short-term malfunction temperature is 100°C for a period of 100 hours in the operating life time.
- Unless specified otherwise, male and female threads acc.to EN 10226-1.

Certification

- WRAS
- DVGW
- KIWA

Uponor S-Press PLUS tee equal PPSU 20-20-20

1039945

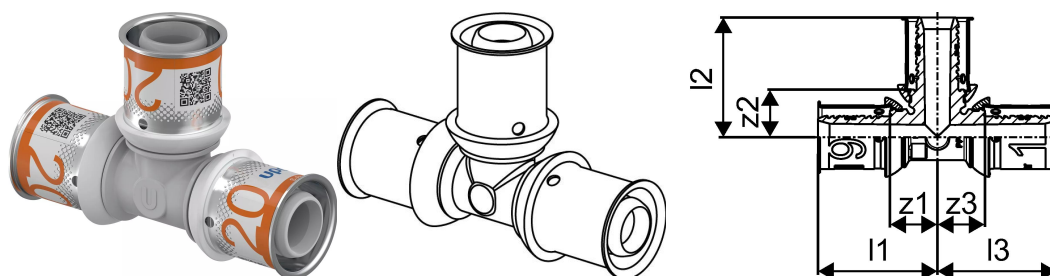

Technical data

Item Quantity 1	10
Item Quantity 2	80
Item (unit of measurement)	pce
Length (l1)	37 mm
Length (l2)	37 mm
Length (l3)	37 mm
z1	16 mm
z2	16 mm
z3	16 mm

Technical documents

Download documents here

Uponor UK

Blackmor Lane The Pavilion
WD18 8GA, Watford
UK

T +44 (0)1923 927000
E enquiries.uk@uponor.com

www.uponor.com/en-gb